


Opto-electronic rotary encoders OsiSense XCC

Catalogue

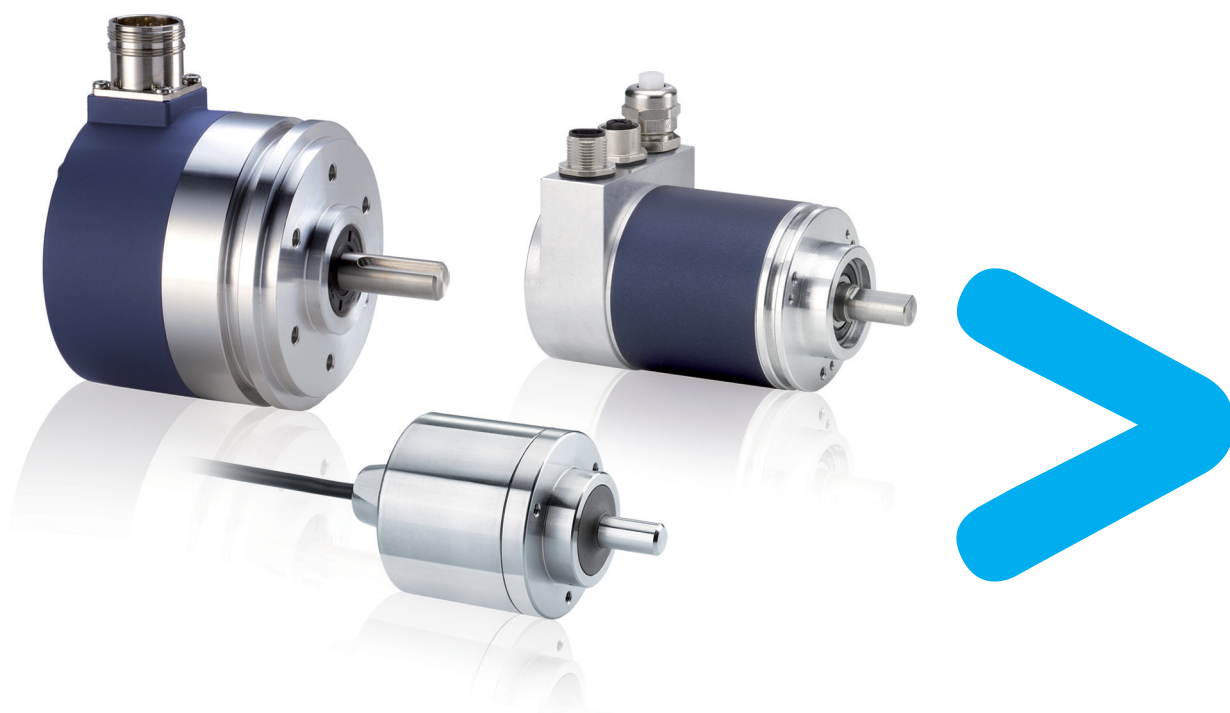

Selection guide page 2

- **General** page 4
 - Incremental encoder, absolute coder: principle page 5
 - Binary coding, Gray coding page 6
 - Characteristics required to define an encoder page 7
 - Installation precautions page 8

Incremental encoders

- **Ø 40 mm encoders**
 - Characteristics and schemes page 10
 - References page 11
 - Dimensions and connections page 18
- **Ø 58 mm encoders, aluminium and stainless steel**
 - Characteristics and schemes page 12
 - References page 13
 - Dimensions and connections page 18
- **Ø 90 mm encoders**
 - Characteristics and schemes page 16
 - References page 17
 - Dimensions and connections page 19

Single turn absolute encoders

- **Ø 58 mm encoders, aluminium and stainless steel**
 - Characteristics and schemes page 22
 - References page 23
 - Dimensions and connections page 26
- **Ø 90 mm encoders**
 - Characteristics and schemes page 24
 - References page 25
 - Dimensions and connections page 26

Multiturn absolute encoders

- **Ø 58 mm encoders, aluminium and stainless steel**
 - Characteristics and schemes page 28
 - References page 29
 - Dimensions and connections page 32
- **Ø 90 mm encoders**
 - Characteristics and schemes page 30
 - References page 31
 - Dimensions and connections page 33

Multiturn absolute encoders on bus

- **CANopen Ø 58 mm encoders**
 - Presentation page 42
 - Characteristics page 43
 - References page 44
 - Dimensions and connections page 45
- **PROFIBUS-DP Ø 58 mm encoders**
 - Presentation page 46
 - Characteristics page 47
 - References page 48
 - Dimensions and connections page 49
- **Product reference index** page 52

| Encoder type | | | Incremental encoders | | | |
|--|--|--|--------------------------|---|---|---|
| Applications | | | Counting indication | | | |
|  | | | | | | |
| | | | | | | |
| Diameter of housing | | | Ø 40 mm | Ø 58 mm | Ø 58 mm parameterable (multi-resolution) (1) | Ø 90 mm |
| Shaft | Solid | | Ø 6 mm | Ø 6 mm and Ø 10 mm (3) | Ø 10 mm | Ø 12 mm |
| | Through | | Ø 6 mm | Ø 14 mm Ø 6, 8, 10 and 12 mm (with reduction collar) | Ø 14 mm Ø 6, 8, 10 and 12 mm (with reduction collar) | Ø 30 mm Ø 12, 20 and 25 mm (with reduction collar) |
| Resolution | Incremental encoders | 100 points | 100 points | 100 points | – | 100 points |
| | | 256 points | – | – | 256 to 4096 points | – |
| | | 360 points | 360 points | 360 points (3) | 360 to 5760 points | 360 points |
| | | 500 points | 500 points | 500 points | 500 to 8000 points | 500 points |
| | | 1000 points | 1000 points | 1000 points | – | 1000 points |
| | | 1024 points | 1024 points | 1024 points (3) | 1024 to 16,384 points | 1024 points |
| | | 2500 points | – | 2500 points | – | 2500 points |
| | | 3600 points | – | – | – | 3600 points |
| | | 4096 points | – | – | – | – |
| | | 5000 points | – | 5000 points (3) | 5000 to 80,000 points | 5000 points |
| | 10,000 points | – | – | – | 10,000 points | |
| | Absolute encoders | 4096 points/8192 turns (12-bit/13-bit) | – | – | – | – |
| 8192 points (13-bit) | | – | – | – | – | |
| 8192 points/4096 turns (13-bit/12-bit) | | – | – | – | – | |
| Output stage Supply (2) | Incremental encoders | Type R (N) | 5 V, RS 422, 4.5...5.5 V | – | – | 5 V, RS 422, 4.5...5.5 V |
| | | Type K (N) | Push-pull, 11...30 V | – | – | Push-pull, 11...30 V |
| | | Type X | – | 5 V, RS 422, 4.75...30 V | 5 V, RS 422, 4.75...30 V | – |
| | | Type Y | – | Push-pull, 5...30 V (3) | Push-pull, 5...30 V | – |
| | Absolute encoders | Type KB (N) or KG (N) | – | – | – | – |
| | | Type SB (N) or SG (N) | – | – | – | – |
| | | Type C | – | – | – | – |
| Type F | – | – | – | – | | |
| Connection | Pre-cabled, radial or axial | | • | • (for stainless steel versions only) | – | – |
| | Connector, radial, M23 Terminal block, radial | | – | • | • | • |
| Type reference | | | XCC14●●●●● | XCC15●●●●● | XCC15●●●●●M●● | XCC19●●●●● |
| Pages | | | 11 | 13 to 15 | | 17 |

(1) Parameterable version: multiplication of the basic resolution of the disc using dip switches, the factory setting being that of the lowest value.

(2) Characteristics of the output stage/supply types:

- **Type R (N):** 5 V output driver, RS 422, 4.5...5.5 V. **Type K (N):** push-pull output driver, 11...30 V.
- **Type X:** 5 V output driver, RS 422, 4.75...30 V. **Type Y:** push-pull output driver, 5...30 V.
- **KB (N) or KG (N) output:** push-pull output driver, 11...30 V, binary code KB (N) or Gray code KG (N).

| Single turn absolute encoders | | Multiturn absolute encoders | | | Accessories for encoders |
|---|--|--|--|---|---|
| Absolute position indication within a revolution | | Absolute position indication within a revolution and indication of the number of revolutions | | Fieldbus: CANopen, PROFIBUS-DP | |
|  | |  | |  |  |
| Ø 58 mm | Ø 90 mm | Ø 58 mm | Ø 90 mm | Ø 58 mm | |
| Ø 6 mm and Ø 10 mm (3) Ø 14 mm Ø 6, 8, 10 and 12 mm (with reduction collar) | Ø 12 mm Ø 30 mm Ø 12, 20 and 25 mm (with reduction collar) | Ø 6 mm and Ø 10 mm (3) Ø 14 mm Ø 6, 8, 10 and 12 mm (with reduction collar) | Ø 12 mm Ø 30 mm Ø 16, 20 and 25 mm (with reduction collar) | Ø 10 mm Ø 15 mm (hollow shaft) Ø 6, 8, 10, 12 and 14 mm (with reduction collar) | - Shaft couplings with spring, - anti-rotation devices, - reduction collars, - pre-wired connectors, - etc. |
| - | - | - | - | - | |
| - | - | - | - | - | |
| - | - | - | - | - | |
| - | - | - | - | - | |
| - | - | - | - | - | |
| - | - | - | - | - | |
| - | - | - | - | - | |
| - | - | 4096 points/8192 turns (3) | - | - | |
| 8192 points (3) | 8192 points | - | - | - | |
| - | - | 8192 points/4096 turns | 8192 points/4096 turns | 8192 points/4096 turns | |
| - | - | - | - | - | |
| - | - | - | - | - | |
| - | - | - | - | - | |
| Push-pull, binary or Gray, 5...30 V or 11...30 V (3) | Push-pull, binary or Gray, 11...30 V, | - | - | - | |
| SSI, 13-bit, binary or Gray 5...30 V or 11...30 V (3) | SSI, 13-bit, binary or Gray 11...30 V | SSI, 25-bit, binary or Gray 5...30 V or 11...30 V (3) | SSI, 25-bit, binary or Gray 11...30 V | - | |
| - | - | - | - | 11...30 V, CANopen | |
| - | - | - | - | 11...30 V, PROFIBUS-DP | |
| ● (for stainless steel encoders only) | - | ● (for stainless steel encoders only) | - | - | |
| ● | ● | ● | ● | ● | |
| - | - | - | - | ● | |
| XCC25●●●●● | XCC29●●●●● | XCC35●●●●● | XCC39●●●●● | XCC35●●●●●CBN XCC35●●●●●FBN | |
| 23 | 25 | 29 | 31 | 44 and 48 | |
| | | | | 35 to 37, 50 and 51 | |

(2) Characteristics of the output stage/supply types (continued):
 - **Type SB (N) or SG (N)**: SSI output without parity, 13-bit or 25-bit, 5...30 V or 11...30 V, binary code SB (N) or Gray code SG (N).
 - **Type KB (N) or KG (N)**: push-pull output driver, 5...30 V or 11...30 V, binary code KB (N) or Gray code KG (N) with multiturn connecting cable.
 - **Type C**: binary CANopen serial link. **Type F**: binary PROFIBUS serial link, RS 485.
 (3) For all encoders versions (including stainless steel versions).

Applications

The increase in the power of processing systems, coupled with the requirements for high productivity, has created the need for continuous information in all areas of production regarding:


- counting, positioning by counting,
- absolute positioning,
- speed control.

Example

The positioning of a moving part is fully controlled by the processing system via the encoder.

■ Processing units
please refer to our “Premium automation platform” catalogue.

■ Variable speed drives
please refer to our “Variable speed drives and starters” catalogue.

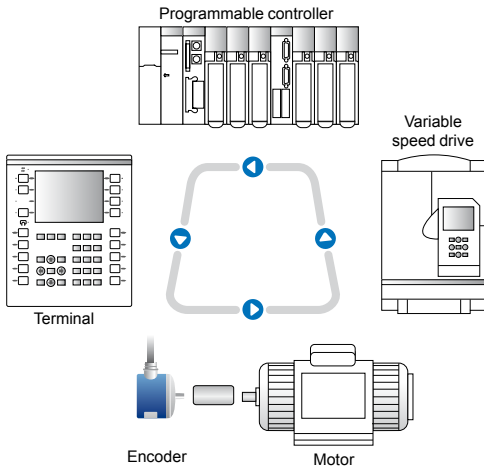

Principle of the opto-electronic rotary encoder

The opto-electronic rotary encoder is an angular position sensor.

Mechanically coupled to a driving spindle of a machine, the shaft of the encoder rotates a disc that comprises a succession of opaque and transparent sectors.

Light from light emitting diodes (LEDs) passes through the transparent sectors of the disc as they appear and is detected by photosensitive diodes.


The photosensitive diodes, in turn, generate an electrical signal which is amplified and converted into a digital signal before being transmitted to a processing system or an electronic variable speed drive.

The electrical output of the encoder therefore represents, in digital form, the angular position of the input shaft.

Types of opto-electronic rotary encoder

- Incremental encoders:
Counting, positioning by counting, speed.
- Parameterable incremental encoders:
Multiplication of the basic resolution of the disc using dip switches (the factory setting being that of the lowest value).
- Single turn and multiturn absolute encoders:
Absolute positioning.
- Fieldbus multiturn absolute encoders:
CANopen and PROFIBUS-DP.

Incremental encoder

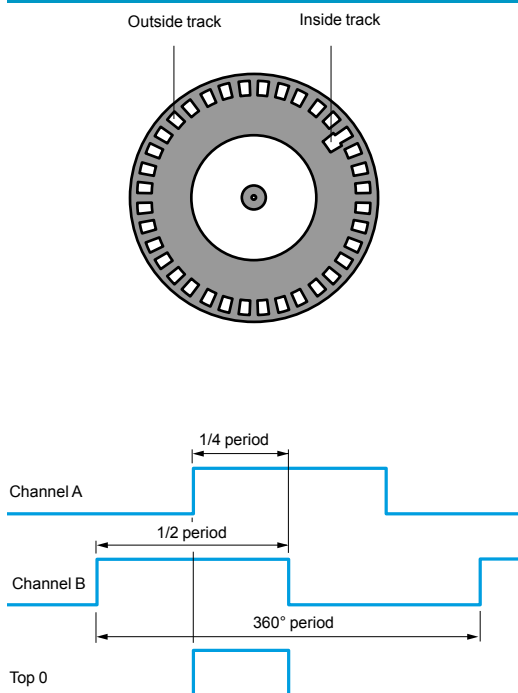

Principle

The disc of an incremental encoder comprises 2 types of track:

- one or several outside tracks (channels A and B), comprising “n” equal angular steps that are alternately opaque and transparent, with “n” being the resolution or number of periods of the encoder,
- an inside track comprising a single window, which serves as the reference point and enables reinitialisation at each revolution (top 0).

Schemes and settings

The operation of the photosensitive elements (LEDs + photosensitive diodes) is based on the real-time differential optical reading principle:

- the photosensitive elements of tracks A and B are offset so that each will simultaneously read only its respective slot (channels A and B are 90° electrically offset),
- the electronics operate following the principle of real-time differential measurement.

Channel B (rising edge) arriving before A in the clockwise direction viewed from base side.

Period: 360° electrical.
 Cyclic ratio: 180° electrical ± 10%.
 Phase displacement: 90° electrical ± 25%.

Advantages of real-time differential optical reading

Reading by offset photosensitive elements


- Radial play of encoder shaft greater than 30%, which is higher than traditional optical reading encoders.
- Maintains a phase displacement of channels A and B within the tolerance limits of the unit.

Triple light source emission

- Maintains cyclic ratio, even in the event of:
 - failure of one of the 3 light sources,
 - diminishing efficiency of the light sources (up to 30%),
 - fine dust deposit on the optical components, reducing signal strength of the photosensitive elements (up to 30%).

These advantages are the reliability factors of the XCC encoders.

Absolute encoder

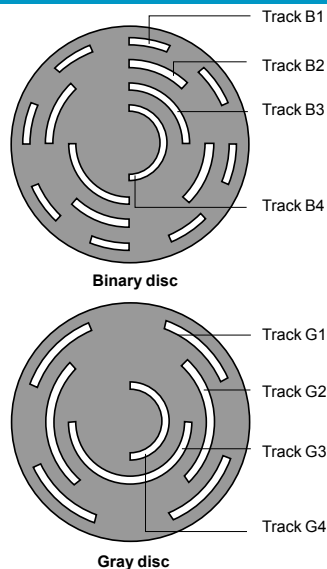

Principle

The disc of an absolute encoder comprises “n” concentric tracks, equally divided into alternate opaque and transparent segments, and each track has its own transmitter and receiver.

The inside track is half opaque and half transparent. Reading of this MSB (Most Significant Bit) track determines in which half-turn the encoder is situated.

The next track is divided into 4 quarters, alternately opaque and transparent. The reading of this track, in conjunction with the previous track, determines in which quarter-turn the encoder is situated.


The following tracks enable successive determination of which eighth-turn, sixteenth-turn, etc. the encoder is situated.

The outside track corresponds to the LSB (Least Significant Bit) and provides the final accuracy. It has 2ⁿ points corresponding to the resolution of the encoder. Therefore, for each angular position of the shaft, the disc provides a code. This code can either be binary or Gray. Following one complete revolution of the encoder, the same coded values are repeated. The multiturn absolute encoder, in addition to providing the digital position within the revolution, also provides the total number of revolutions.

Absolute encoder (continued)


Binary coding

The binary code is directly usable by processing systems (programmable controllers for example) in order to execute calculations or comparisons, but has the disadvantage of having several bits which change state between 2 positions.

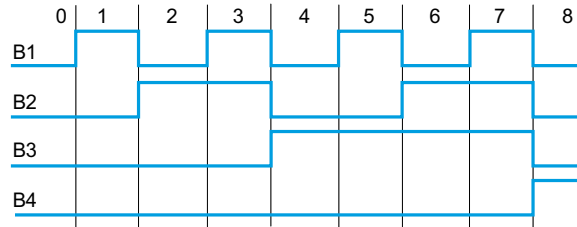

Gray coding

The Gray code offers the advantage of only changing one bit between 2 consecutive numbers.

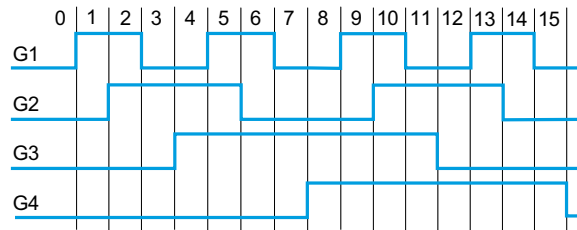

Example of Gray code disc

| | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | |
|-----------------|---|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| 2 ⁰ | 0 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | | |
| 2 ² | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 |
| 2 ⁴ | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 2 ⁸ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 |
| 2 ¹⁶ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Representation of the first 24 decimal values corresponding to the reading of the first 5 tracks.

Advantages of position detection by an absolute encoder

An absolute encoder continuously provides a code that is an image of the actual position of the moving object being monitored.

On power-up, or restart following a supply failure, the encoder provides data that is directly exploitable by the processing system.

7 characteristics to be established

1 Function

- Incremental encoder
Provides counting indication.
- Single turn absolute encoder
Provides absolute position within each revolution.
- Multiturn absolute encoder
Provides absolute position within each revolution and indicates total number of revolutions.

2 Diameter of housing

- Incremental encoders
Ø 40, 58 and 90
- Single turn and multiturn absolute encoders
Ø 58 and 90

3 Diameter of shaft

- Ø 6 mm to 30 mm, depending on model
- Reduction collars
For Ø 58 and 90 mm encoders, with Ø 14, 15 and 30 mm through shaft, reduction collars are available to reduce the diameters:
 - from 14 to 6, 8, 10 and 12
 - from 15 to 6, 8, 10, 12 and 14
 - from 30 to 12, 16, 20 and 25.

4 Type of shaft

- Solid shaft
The shaft of the encoder is mechanically linked to a drive shaft using a flexible coupling, which eliminates alignment inaccuracies.
- Through shaft/Hollow shaft
The encoder is mounted directly on the drive shaft. A flexible mounting kit prevents encoder rotation and compensates for alignment inaccuracies.

5 Connection method


- Pre-cabled with 2 m long shielded cable or M23/M12 connector.
- Radial type connection.

6 Resolution

- Number of points per revolution.
- Number of revolutions (for multiturn absolute encoders).
- On Ø 58 parameterable incremental encoders, this resolution can be adjusted using dip switches (multiplication factor up to 16 times on 9 basic resolutions).

7 Type of output

- Incremental encoders
5 V output driver, RS 422, 4.75...30 V.
Push-pull output driver, 5...30 V, 11...30 V.
- Single turn absolute encoders (depending on model)
Push-pull output driver, 11...30 V, binary code or Gray code.
SSI output without parity, 13-bit clock, 11...30 V, binary code or Gray code.
- Multiturn absolute encoders (depending on model)
SSI output without parity, 25-bit clock, 11...30 V, binary code or Gray code.
- Parallel outputs obtainable using converter connecting cables
The SSI versions can be converted to a parallel version by using the deserialisation connecting cable (see page 35).
- Multiturn absolute encoders, communicating version, fieldbus:
 - CANopen: 11...30 V (see page 42).
 - PROFIBUS-DP: 11...30 V (see page 46).

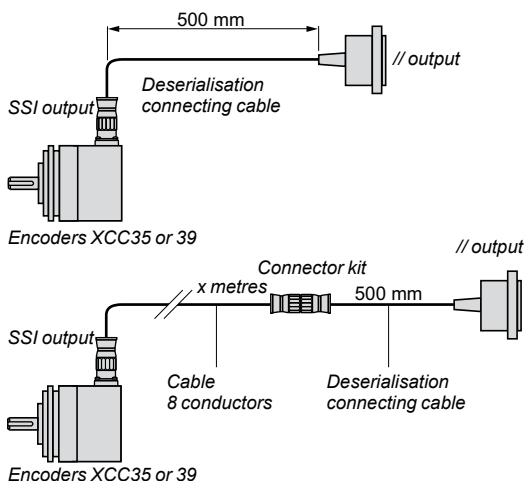

Installation precautions

Type of cables

In an environment subject to considerable electrical interference, it is recommended that cables with several twisted pairs, reinforced by general shielding, be used.

For the signals, it is recommended that standard 0.14 mm²/0.22 mm² conductors be used.

For 5 V supply encoders.

Due to line voltage drops, it is recommended that the 0 V and + V supply cables have the following minimum cross-sectional areas:

- 0.14 mm² if the encoder-supply distance is less than 30 m,
- 0.22 mm² if the encoder-supply distance is greater than 30 m.

Cabling

Separate, by as much as possible, the connecting cables to encoders and power cables. Also, avoid parallel cable runs. Maintain a distance of at least 20 cm and, in the event of cables crossing, ensure that the crossovers are at right-angles.

When using cables with twisted pairs (shielded or non shielded) group signal cables in common pairs.

In environments subject to electrical interference, it is recommended to earth the encoder base using one of the fixing screws.

Connect the control inputs to a potential (absolute encoder).

Connect all 0 V connections back to a star point, i.e. only one and same referential. Earth the shielding throughout 360° using tap-off braids. This is to be done at both ends of each cable. To earth the shielding use at least 4 mm² cable.

As much as possible, earth the 0 V of the supply to the encoders on the supply side.

Maximum frequency of signals for SSI depending on distance:

Indicative values that can vary depending on the cable characteristics.

| Distance (m) | Frequency (kHz) |
|--------------|-----------------|
| 50 | 400 |
| 100 | 300 |
| 200 | 200 |
| 400 | 100 |

Supply

It is imperative that regulated and smoothed power supplies, with a ripple factor on 24 V of 500 mV and on 5 V of 200 mV, are used that are specifically for the encoder. Schneider Electric ABL7 range power supplies are available. Please refer to the website: www.schneider-electric.com.

For 5...30 V encoders, the supply via a transformer with a 24 V rms rectified and smoothed secondary is prohibited, since the DC voltage obtained is higher than the supply voltage limits of the encoder.

Prior to powering-up for the first time, ensure that the rated supply voltage of the encoder is suitable for the supply.

Opto-electronic rotary encoders

Characteristics required to define an encoder, installation, powering-up

Connection and powering-up precautions

Connection

The plugging-in or unplugging of a connector version encoder must only be done whilst the supply is disconnected.

Encoder supplied by central unit:

- disconnect supply to central unit,
- proceed with connection or disconnection,
- re-establish supply to central unit.

Encoder supplied by source external to central unit:

- disconnect supply to central unit, then disconnect supply to encoder,
- proceed with connection or disconnection,
- re-establish supply to encoder, then re-establish supply to central unit.

Powering-up

For synchronisation reasons, the powering-up or switching-off of the encoder must coincide with that of its associated electronics.

Environment

| Encoder type | | XCC1406P●●●● | XCC1406T●●●● |
|--|---|--|--------------|
| Conformity | | CE | |
| Temperature | Operation (housing) | °C - 20...+ 80 | |
| | Storage | °C - 30...+ 85 | |
| Degree of protection | Conforming to IEC 60529 | IP 54 | IP 52 |
| Vibration resistance | Conforming to IEC 60068-2-6 | 10 gn (f = 10...500 Hz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | |
| Resistance to electromagnetic interference | Electrostatic discharges | Conforming to IEC 61000-4-2: level 3, 8 kV air; 4 kV contact | |
| | Radiated electromagnetic fields (electromagnetic waves) | Conforming to IEC 61000-4-3: level 3, 10 V/m | |
| | Fast transients (Start/Stop interference) | Conforming to IEC 61000-4-4: level 3, 2 kV (1 kV for inputs/outputs) | |
| | Surge withstand | Conforming to IEC 61000-4-5: level 2, 1 kV | |
| Materials | Base | Aluminium or Zamak | |
| | Housing | Aluminium or Zamak | |
| | Shaft | Stainless steel or aluminium | |
| | Ball bearings | 688AZZ1 | |

Mechanical characteristics


| Shaft type | | mm | Ø 6, solid shaft (g7) | Ø 6, through shaft (H7) |
|--------------------------|------------|-------------------|-----------------------|-------------------------|
| Maximum rotational speed | Continuous | | 9000 rpm | |
| Shaft moment of inertia | | g.cm ² | 10 | 5 |
| Torque | | N.cm | 0.2 | 0.25 |
| Maximum load | Radial | daN | 2 | |
| | Axial | daN | 1 | |

Electrical characteristics


| | | | |
|---|------------|--|---|
| Connection | | Radial: pre-cabled, 8 x 0.14 mm ² shielded, Ø ext = 6 mm, length = 2 m Crimped metal cable entry | Pre-cabled 8 x 0.14 mm ² shielded, Ø ext = 6 mm, length = 2 m Crimped metal cable entry |
| Frequency | | kHz 100 | |
| Number of channels | | 3 channels: A, B, top 0 and complements \bar{A} , \bar{B} , $\bar{0}$ | |
| Encoders with type R output stage: 5 V output driver, RS 422, 4.5...5.5 V supply | | | |
| Supply voltage | | 5 V ± 10% Maximum ripple: 200 mV | |
| Current consumption, no-load | | mA 100 maximum | |
| Output current | | mA 40 maximum | |
| Output levels | Low level | 0.5 V maximum (I _s = 20 mA) | |
| | High level | 2.5 V minimum (I _s = 20 mA) | |
| Encoders with type K output stage: push-pull output driver, 11...30 V supply | | | |
| Supply voltage | | 11 V...30 V. Maximum ripple: 500 mV | |
| Current consumption, no-load | | mA 75 maximum | |
| Protection | | Against short-circuits and reverse polarity | |
| Output current | | mA 40 maximum | |
| Output levels | Low level | 1.5 V maximum (I _s = 20 mA) | |
| | High level | V supply - 3 V minimum (I _s = 20 mA) | |

Schemes

Type R output stage

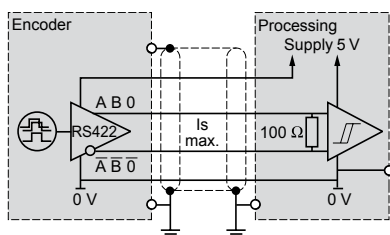

Type K output stage

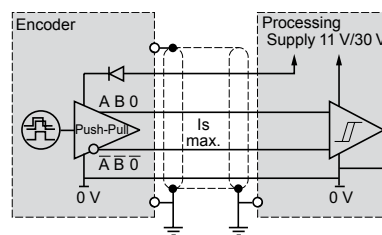

Incremental encoders

OsiSense XCC

Ø 40 mm encoders

105160



XCC1406PR●●●

Solid shaft, Ø 6 mm

| Resolution | Connection method | Output stage type (1) | Supply voltage | Reference | Weight kg |
|-------------|-------------------------------|-----------------------|----------------|--------------|-----------|
| 100 points | Pre-cabled, radial L = 2 m | 5 V, RS 422 | 4.5...5.5 V | XCC1406PR01R | 0.355 |
| | | Push-pull | 11...30 V | XCC1406PR01K | 0.355 |
| 360 points | Pre-cabled, radial L = 2 m | 5 V, RS 422 | 4.5...5.5 V | XCC1406PR03R | 0.355 |
| | | Push-pull | 11...30 V | XCC1406PR03K | 0.355 |
| 500 points | Pre-cabled, radial L = 2 m | 5 V, RS 422 | 4.5...5.5 V | XCC1406PR05R | 0.355 |
| | | Push-pull | 11...30 V | XCC1406PR05K | 0.355 |
| 1000 points | Pre-cabled, radial L = 2 m | 5 V, RS 422 | 4.5...5.5 V | XCC1406PR10R | 0.355 |
| | | Push-pull | 11...30 V | XCC1406PR10K | 0.355 |
| 1024 points | Pre-cabled, radial L = 2 m | 5 V, RS 422 | 4.5...5.5 V | XCC1406PR11R | 0.355 |
| | | Push-pull | 11...30 V | XCC1406PR11K | 0.355 |

105161



XCC1406TR●●●

Through shaft, Ø 6 mm (2)

| Resolution | Connection method | Output stage type (1) | Supply voltage | Reference | Weight kg |
|-------------|-------------------------------|-----------------------|----------------|--------------|-----------|
| 100 points | Pre-cabled, radial L = 2 m | 5 V, RS 422 | 4.5...5.5 V | XCC1406TR01R | 0.405 |
| | | Push-pull | 11...30 V | XCC1406TR01K | 0.405 |
| 360 points | Pre-cabled, radial L = 2 m | 5 V, RS 422 | 4.5...5.5 V | XCC1406TR03R | 0.405 |
| | | Push-pull | 11...30 V | XCC1406TR03K | 0.405 |
| 500 points | Pre-cabled, radial L = 2 m | 5 V, RS 422 | 4.5...5.5 V | XCC1406TR05R | 0.405 |
| | | Push-pull | 11...30 V | XCC1406TR05K | 0.405 |
| 1000 points | Pre-cabled, radial L = 2 m | 5 V, RS 422 | 4.5...5.5 V | XCC1406TR10R | 0.405 |
| | | Push-pull | 11...30 V | XCC1406TR10K | 0.405 |
| 1024 points | Pre-cabled, radial L = 2 m | 5 V, RS 422 | 4.5...5.5 V | XCC1406TR11R | 0.405 |
| | | Push-pull | 11...30 V | XCC1406TR11K | 0.405 |

(1) For characteristics of the output stage type (indicated by last letter of the reference), see page 10.

(2) Anti-rotation device included with encoder.

Incremental encoders

OsiSense XCC

Ø 58 mm encoders, aluminium and stainless steel versions


| Environment | | | XCC1506P●●●● | XCC1510P●●●● | XCC1510S●●●● | XCC1514T●●●● |
|--|---|----|--|---|----------------------|---------------------|
| Encoder type | | | XCC1506P●●●● XCC1510P●●●● XCC1510S●●●● XCC1514T●●●● | | | |
| Conformity | | | CE | | | |
| Temperature | Operation (housing) | °C | - 30...+ 100 (except XCCTSM●●X and XCCTSM●●Y: - 30...+ 70) | | | |
| | Storage | °C | - 30...+ 85 | - 30...+ 85 | - 40...+ 100 | - 30...+ 85 |
| Degree of protection | Conforming to IEC 60529 | | IP 65 | IP 65 (IP 67 with collar option XCCRB3) | IP 68 / IP 69K | IP 65 |
| Vibration resistance | Conforming to IEC 60068-2-6 | | 10 gn (f = 55...2000 Hz) | | | |
| Shock resistance | Conforming to IEC 60068-2-27 | | 50 gn, duration 6 ms | | | |
| Resistance to electromagnetic interference | Electrostatic discharges | | Conforming to IEC 61000-4-2: level 3, 8 kV air, 4 kV contact | | | |
| | Radiated electromagnetic fields (electromagnetic waves) | | Conforming to IEC 61000-4-3: level 3, 10 V/m | | | |
| | Fast transients (Start/Stop interference) | | Conforming to IEC 61000-4-4: level 3, 2 kV (1 kV for inputs/outputs) | | | |
| | Surge withstand | | Conforming to IEC 61000-4-5: level 2, 1 kV | | | |
| Materials | Base | | Aluminium | | Stainless steel 316L | Aluminium |
| | Housing | | Zamak | | Stainless steel 316L | Zamak |
| | Shaft | | Stainless steel 303 | | Stainless steel 316L | Stainless steel 303 |
| | Ball bearings | | 6000 | | | 6803ZZ |
| | Shaft seal | | - | | Teflon ring | - |

| Mechanical characteristics | | | Ø 6, solid shaft (g7) | Ø 10 mm, solid shaft | Ø 14, through shaft (H7) |
|----------------------------|------------|-------------------|-----------------------|----------------------|--------------------------|
| Shaft type | | | Ø 6, solid shaft (g7) | Ø 10 mm, solid shaft | Ø 14, through shaft (H7) |
| Maximum rotational speed | Continuous | | 9000 rpm | 9000 rpm | 3000 rpm |
| Shaft moment of inertia | | g.cm ² | 10 | 10 | 12 |
| Torque | | N.cm | 0.4 | 0.4 | 9 |
| Maximum load | Radial | daN | 10 | 10 | 25 |
| | Axial | daN | 5 | 5 | 50 |


| Electrical characteristics | | | M23, 12-pin male connector (2 m silicone cable for XCC1510S●●●) | | |
|---|------------|-----|---|--|--|
| Connection | Connector | | M23, 12-pin male connector (2 m silicone cable for XCC1510S●●●) | | |
| Frequency | | kHz | 300 | | |
| Number of channels | | | 3 channels: A, B, top 0 and complements \bar{A} , \bar{B} , $\bar{0}$ | | |
| Encoders with type X output stage: 5 V output driver, RS 422, 4.75...30 V supply | | | | | |
| Supply voltage | | | 4.75...30 V Maximum ripple: 500 mV | | |
| Current consumption, no-load | | mA | 75 maximum | | |
| Protection | | | Against short-circuits and reverse polarity | | |
| Output current | | mA | 40 maximum | | |
| Output levels | Low level | | 0.5 V maximum (I _s = 20 mA) | | |
| | High level | | 4.5 V minimum (I _s = 20 mA) | | |
| Encoders with type Y output stage: push-pull output driver, 5...30 V supply | | | | | |
| Supply voltage | | | 5...30 V Maximum ripple: 500 mV | | |
| Current consumption, no-load | | mA | 75 maximum | | |
| Protection | | | Against short-circuits and reverse polarity | | |
| Output current | | mA | 40 maximum | | |
| Output levels (for U supply = 30 V) (1) | Low level | | 0.5 V maximum (I _s = 20 mA) | | |
| | High level | | V supply - 2.5 V minimum (I _s = 20 mA) | | |

Schemes

Type X output stage

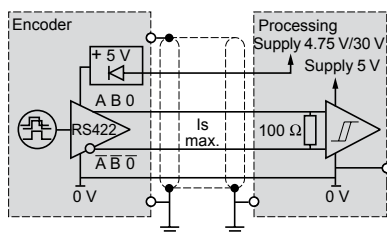

Type Y output stage

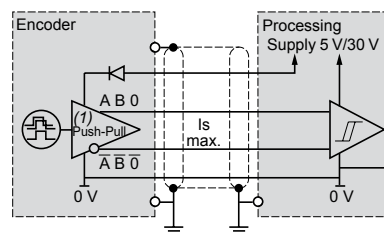

(1) RS 422 compatible on 5 V supply.

Incremental encoders

OsiSense XCC

Ø 58 mm encoders, aluminium and stainless steel versions



XCC1506PS●●●



XCC1510SPA●●●



XCC1510PS●●●

Solid shaft, Ø 6 mm

| Resolution | Connection method (1) | Output stage type (2) | Supply voltage | Reference | Weight kg |
|-------------|-------------------------------|-----------------------|----------------|--------------|-----------|
| 100 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1506PS01X | 0.495 |
| | | Push-pull | 5...30 V | XCC1506PS01Y | 0.495 |
| 360 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1506PS03X | 0.495 |
| | | Push-pull | 5...30 V | XCC1506PS03Y | 0.495 |
| 500 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1506PS05X | 0.495 |
| | | Push-pull | 5...30 V | XCC1506PS05Y | 0.495 |
| 1000 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1506PS10X | 0.495 |
| | | Push-pull | 5...30 V | XCC1506PS10Y | 0.495 |
| 1024 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1506PS11X | 0.495 |
| | | Push-pull | 5...30 V | XCC1506PS11Y | 0.495 |
| 2500 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1506PS25X | 0.495 |
| | | Push-pull | 5...30 V | XCC1506PS25Y | 0.495 |
| 5000 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1506PS50X | 0.495 |
| | | Push-pull | 5...30 V | XCC1506PS50Y | 0.495 |

Solid shaft, Ø 10 mm

| Resolution | Connection method (1) | Output stage type (2) | Supply voltage | Reference | Weight kg |
|-------------|-------------------------------|-----------------------|----------------|--------------|-------------------|
| 100 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PS01X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PS01Y | 0.465 |
| 360 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PS03X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PS03Y | 0.465 |
| | | Cable (2 m) | Push-pull | 5...30 V | XCC1510SPA03Y (3) |
| 500 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PS05X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PS05Y | 0.465 |
| 1000 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PS10X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PS10Y | 0.465 |
| 1024 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PS11X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PS11Y | 0.465 |
| | | Cable (2 m) | Push-pull | 5...30 V | XCC1510SPA11Y (3) |
| 2500 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PS25X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PS25Y | 0.465 |
| 5000 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PS50X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PS50Y | 0.465 |
| | | Cable (2 m) | Push-pull | 5...30 V | XCC1510SPA50Y (3) |

(1) For female connector use XZCC23FDP120S or pre-wired connectors (L = 2, 5 or 10 m), see page 35.

(2) For characteristics of the output stage type (indicated by last letter of the reference), see page 12.

(3) Stainless steel 316L version.


Incremental encoders

OsiSense XCC
 Ø 58 mm encoders



XCC1514TS●●●

| Through shaft, Ø 14 mm (1) | | | | | |
|----------------------------|----------------------------|-----------------------|----------------|--------------|-----------|
| Resolution | Connection method (2) | Output stage type (3) | Supply voltage | Reference | Weight kg |
| 100 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TS01X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TS01Y | 0.435 |
| 360 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TS03X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TS03Y | 0.435 |
| 500 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TS05X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TS05Y | 0.435 |
| 1000 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TS10X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TS10Y | 0.435 |
| 1024 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TS11X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TS11Y | 0.435 |
| 2500 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TS25X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TS25Y | 0.435 |
| 5000 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TS50X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TS50Y | 0.435 |



XCCR158RDA●●

| Reduction collars for encoders with through shaft, Ø 14 mm | | | |
|--|----------|--------------|-----------|
| For use with | Diameter | Reference | Weight kg |
| Encoders with through shaft XCC1514TS●●● | Ø 6 mm | XCCR158RDA06 | 0.015 |
| | Ø 8 mm | XCCR158RDA08 | 0.010 |
| | Ø 10 mm | XCCR158RDA10 | 0.010 |
| | Ø 12 mm | XCCR158RDA12 | 0.010 |

(1) Anti-rotation device included with encoder.
 (2) For female connector use XZCC23FDP120S or pre-wired connectors (L = 2, 5 or 10 m), see page 35.
 (3) For characteristics of the output stage type (indicated by last letter of the reference), see page 12.

Incremental encoders

OsiSense XCC

Ø 58 mm encoders

Parameterable versions (1)

105194



XCC1510PSM02X

Parameterable with solid shaft, Ø 10 mm

| Resolution | Connection method (2) | Output stage type (3) | Supply voltage | Reference | Weight kg |
|----------------------|----------------------------|-----------------------|----------------|---------------|-----------|
| 256...4096 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PSM02X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PSM02Y | 0.465 |
| 360...5760 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PSM03X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PSM03Y | 0.465 |
| 500...8000 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PSM05X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PSM05Y | 0.465 |
| 1024...16,384 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PSM11X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PSM11Y | 0.465 |
| 5000...80,000 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1510PSM50X | 0.465 |
| | | Push-pull | 5...30 V | XCC1510PSM50Y | 0.465 |


Parameterable with through shaft, Ø 14 mm (4)

| Resolution | Connection method (2) | Output stage type (3) | Supply voltage | Reference | Weight kg |
|----------------------|----------------------------|-----------------------|----------------|---------------|-----------|
| 256...4096 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TSM02X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TSM02Y | 0.435 |
| 360...5760 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TSM03X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TSM03Y | 0.435 |
| 500...8000 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TSM05X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TSM05Y | 0.435 |
| 1024...16,384 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TSM11X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TSM11Y | 0.435 |
| 5000...80,000 points | Connector, radial M23 male | 5 V, RS 422 | 4.75...30 V | XCC1514TSM50X | 0.435 |
| | | Push-pull | 5...30 V | XCC1514TSM50Y | 0.435 |

Reduction collars for parameterable encoders with through shaft, Ø 14 mm

| For use with | Diameter | Reference | Weight kg |
|---|----------|--------------|-----------|
| Encoders with through shaft XCC1514TSM●●● | Ø 6 | XCCR158RDA06 | 0.015 |
| | Ø 8 | XCCR158RDA08 | 0.010 |
| | Ø 10 | XCCR158RDA10 | 0.010 |
| | Ø 12 | XCCR158RDA12 | 0.010 |

514214



XCCR158RDA●●

(1) Parameter configuration: refer to table indicating position of dip switches on page 21.

(2) For female connector use XZCC23FDP120S or pre-wired connectors (L = 2, 5 or 10 m), see page 35.

(3) For characteristics of the output stage type (indicated by last letter of the reference), see page 12.

(4) Anti-rotation device included with encoder.

Environment

| Encoder type | | XCC1912P●●●● | XCC1930T●●●● |
|--|---|--|--------------|
| Conformity | | CE | |
| Temperature | Operation (housing) | °C - 20...+ 80 | |
| | Storage | °C - 30...+ 85 | |
| Degree of protection | Conforming to IEC 60529 | IP 66 | IP 65 |
| Vibration resistance | Conforming to IEC 60068-2-6 | 10 gn (f = 10...1 kHz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | |
| Resistance to electromagnetic interference | Electrostatic discharges | Conforming to IEC 61000-4-2: level 3, 8 kV air; 4 kV contact | |
| | Radiated electromagnetic fields (electromagnetic waves) | Conforming to IEC 61000-4-3: level 3, 10 V/m | |
| | Fast transients (Start/Stop interference) | Conforming to IEC 61000-4-4: level 3, 2 kV (1 kV for inputs/outputs) | |
| | Surge withstand | Conforming to IEC 61000-4-5: level 2, 1 kV | |
| Materials | Base | Aluminium | |
| | Housing | Zamak | |
| | Shaft | Stainless steel | |
| | Ball bearings | 6001ZZ | 6807 |

Mechanical characteristics


| | | | |
|--------------------------|------------|-----------------------------|--------------------------|
| Shaft type | | Ø 12, solid shaft (g6) | Ø 30, through shaft (H7) |
| Maximum rotational speed | Continuous | 6000 rpm | 3600 rpm |
| Shaft moment of inertia | | g.cm² 150 | 500 |
| Torque | | N.cm 1 | 2.5 |
| Maximum load | Radial | daN 20 | 8 |
| | Axial | daN 10 | 5 |

Electrical characteristics


| | | | |
|---|------------|---|--|
| Connection | Connector | M23, 12-pin male connector | |
| Frequency | | kHz 100 | |
| Number of channels | | 3 channels: A, B, top 0 and complements \bar{A} , \bar{B} , $\bar{0}$ | |
| Encoders with type R (N) output stage: 5 V output driver, RS 422, 4.5...5.5 V supply | | | |
| Supply voltage | | ± 5 V ± 10% Maximum ripple: 200 mV | |
| Current consumption, no-load | | mA 100 maximum | |
| Output current | | mA 40 maximum | |
| Output levels | Low level | 0.5 V maximum (I _s = 20 mA) | |
| | High level | V supply - 2.5 V minimum (I _s = 20 mA) | |
| Encoders with type K (N) output stage: push-pull output driver, 11...30 V supply | | | |
| Supply voltage | | ± 11 V...30 V Maximum ripple: 500 mV | |
| Current consumption, no-load | | mA 75 maximum | |
| Protection | | Against short-circuits and reverse polarity | |
| Output current | | mA 40 maximum | |
| Output levels | Low level | 1.5 V maximum (I _s = 20 mA) | |
| | High level | V supply - 3 V minimum (I _s = 20 mA) | |

Schemes

Type R (N) output stage

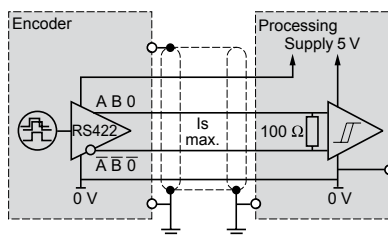

Type K (N) output stage

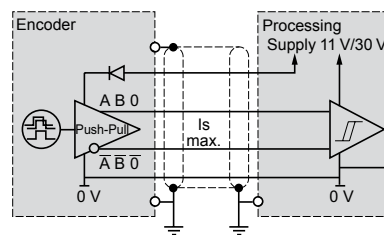

Incremental encoders

OsiSense XCC
Ø 90 mm encoders

105168




XCC1912PS●●●N

105171



XCC1930TS●●●N

523200



XCCR290RDP●●

Solid shaft, Ø 12 mm

| Resolution | Connection method (1) | Output stage type (2) | Supply voltage | Reference | Weight kg |
|---------------|----------------------------|-----------------------|----------------|---------------|-----------|
| 100 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1912PS01RN | 1.360 |
| | | Push-pull | 11...30 V | XCC1912PS01KN | 1.360 |
| 360 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1912PS03RN | 1.360 |
| | | Push-pull | 11...30 V | XCC1912PS03KN | 1.360 |
| 500 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1912PS05RN | 1.360 |
| | | Push-pull | 11...30 V | XCC1912PS05KN | 1.360 |
| 1000 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1912PS10RN | 1.360 |
| | | Push-pull | 11...30 V | XCC1912PS10KN | 1.360 |
| 1024 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1912PS11RN | 1.360 |
| | | Push-pull | 11...30 V | XCC1912PS11KN | 1.360 |
| 2500 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1912PS25RN | 1.360 |
| | | Push-pull | 11...30 V | XCC1912PS25KN | 1.360 |
| 3600 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1912PS36RN | 1.360 |
| | | Push-pull | 11...30 V | XCC1912PS36KN | 1.360 |
| 5000 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1912PS50RN | 1.360 |
| | | Push-pull | 11...30 V | XCC1912PS50KN | 1.360 |
| 10,000 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1912PS00RN | 1.360 |
| | | Push-pull | 11...30 V | XCC1912PS00KN | 1.360 |

Through shaft, Ø 30 mm (3)

| Resolution | Connection method (1) | Output stage type (2) | Supply voltage | Reference | Weight kg |
|---------------|----------------------------|-----------------------|----------------|---------------|-----------|
| 100 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1930TS01RN | 0.960 |
| | | Push-pull | 11...30 V | XCC1930TS01KN | 0.960 |
| 360 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1930TS03RN | 0.960 |
| | | Push-pull | 11...30 V | XCC1930TS03KN | 0.960 |
| 500 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1930TS05RN | 0.960 |
| | | Push-pull | 11...30 V | XCC1930TS05KN | 0.960 |
| 1000 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1930TS10RN | 0.960 |
| | | Push-pull | 11...30 V | XCC1930TS10KN | 0.960 |
| 1024 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1930TS11RN | 0.960 |
| | | Push-pull | 11...30 V | XCC1930TS11KN | 0.960 |
| 2500 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1930TS25RN | 0.960 |
| | | Push-pull | 11...30 V | XCC1930TS25KN | 0.960 |
| 3600 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1930TS36RN | 0.960 |
| | | Push-pull | 11...30 V | XCC1930TS36KN | 0.960 |
| 5000 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1930TS50RN | 0.960 |
| | | Push-pull | 11...30 V | XCC1930TS50KN | 0.960 |
| 10,000 points | Connector, radial M23 male | 5 V, RS 422 | 4.5...5.5 V | XCC1930TS00RN | 0.960 |
| | | Push-pull | 11...30 V | XCC1930TS00KN | 0.960 |

Reduction collars for encoders with through shaft, Ø 30 mm

| For use with | Diameter | Reference | Weight kg |
|--|----------|--------------|-----------|
| Encoders with through shaft XCC1930TS●●●●N | Ø 12 mm | XCCR290RDP12 | 0.060 |
| | Ø 16 mm | XCCR290RDP16 | 0.060 |
| | Ø 20 mm | XCCR290RDP20 | 0.030 |
| | Ø 25 mm | XCCR290RDP25 | 0.025 |

(1) For female connector use XZCC23FDP120S or pre-wired connectors (L = 2, 5 or 10 m), see page 35.

(2) For characteristics of the output stage type (indicated by last letter of the reference), see page 16.

(3) Anti-rotation device included with encoder.


Incremental encoders

OsiSense XCC

Ø 40 mm and Ø 58 mm encoders


Ø 40 mm encoders

XCC1406PR●●●N

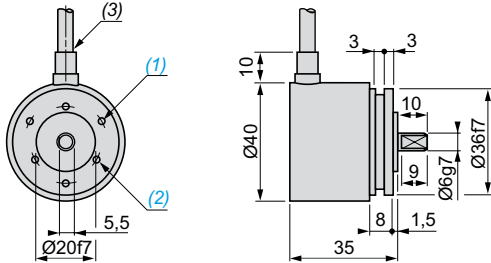

- (1) 3 holes M3 x 0.5 at 120° on 28 PCD, depth: 5 mm.
- (2) 3 holes M3 x 0.5 at 120° on 24 PCD, depth: 5 mm.
- (3) Ø 6 cable, length 2 m, minimum bend radius: 30 mm.


XCC1406TR●●●N

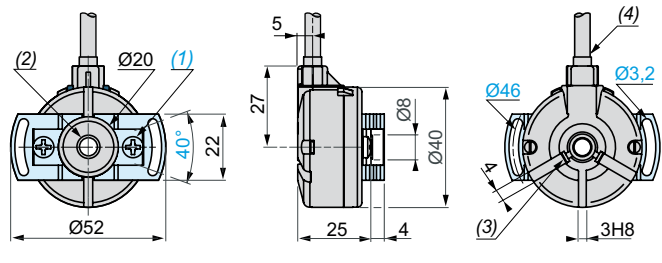

- (1) 2 M4 holes at 120° for cross-headed screws on 30 PCD, depth: 6 mm.
- (2) Through shaft, Ø 6 (H7).
- (3) 2 M2 x 3 flat cross-headed locking screws.
- (4) Ø 6 cable, length 2 m, minimum bend radius: 30 mm.


Ø 58 mm encoders

XCC1506PS●●●X, XCC1506PS●●●Y

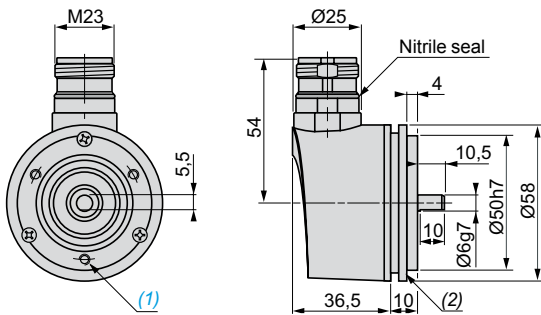


- (1) 3 holes M3 x 4 at 120° on 42 PCD, depth: 10 mm.
- (2) Collar XCCRB1 mounted.

XCC1510PS●●●X, 1510PS●●●Y / XCC1510PSM●●●X, 1510PSM●●●Y

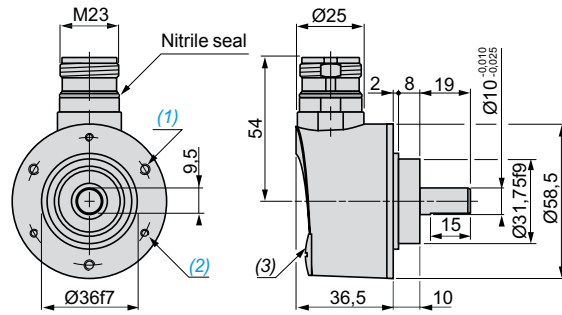

- (1) 3 M4 holes at 120° on 48 PCD, depth: 8 mm.
- (2) 3 M3 holes at 120° on 48 PCD, depth: 8 mm.
- (3) Blanking plug, for encoders XCC1510PSM●●●X and 1510PSM●●●Y only.


XCC1514TS●●●X, 1514TS●●●Y / XCC1514TSM●●●X, 1514TSM●●●Y

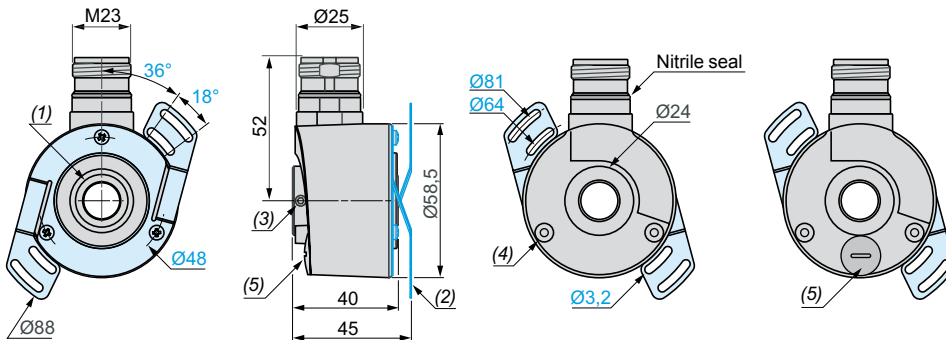

- (1) Through shaft, Ø 14 (H7).
- (2) Flexible mounting kit, 1 x XCCRF5N mounted.
- (3) 2 HC M4 x 4 locking screws.
- (4) Hole for M3 x 6 self-threading screw.
- (5) Blanking plug, for encoders XCC1514TSM●●●X and 1514TSM●●●Y only.

Ø 58 mm encoders (continued)


XCC1510SPA●●Y

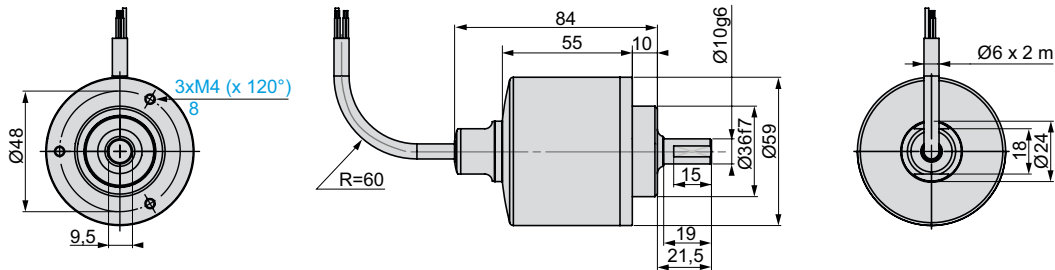

R: minimum bend radius = 60 mm.


Ø 90 mm encoders

XCC1912PS●●●N

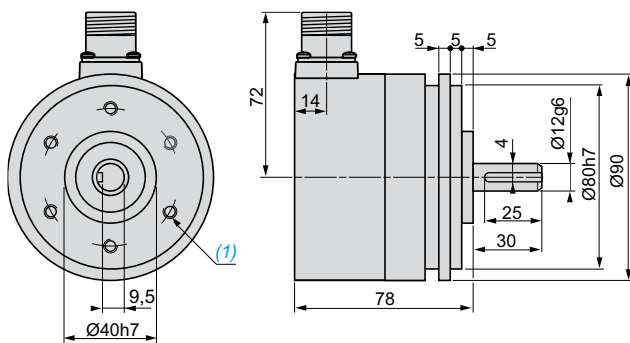

(1) 6 holes M6 x 1 at 120° on 60 PCD, maximum depth: 12 mm.

XCC1930TS●●●N

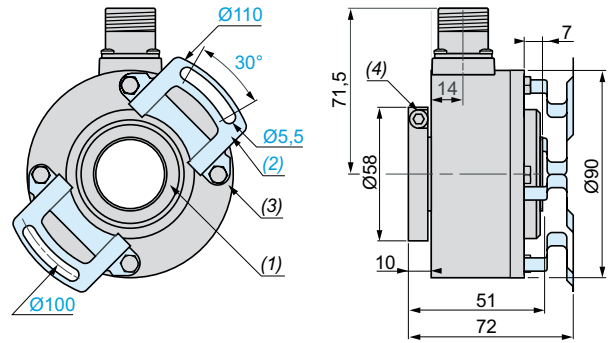

- (1) Through shaft, Ø 30 (H7).
- (2) Anti-rotation device, 1 x XCCRF9N, mounted.
- (3) 4 M5 x 6 on 78 PCD.
- (4) 1 CHC M5 x 12 stainless steel A2 locking screw.

Incremental encoders

OsiSense XCC

Ø 40 mm, Ø 58 mm and Ø 90 mm encoders

Pre-cabled version encoders (1)

8 x 0.14 mm² shielded cable connections for Ø 40 encoders and Ø 58 encoders stainless steel version

| Wire colour | PK | BN | GY | RD | YE | BU | GN | WH |
|---------------|----------------|----|----|----------------|----|----------------|----|----|
| Signal Supply | A ⁻ | +V | 0 | 0 ⁻ | B | B ⁻ | A | 0V |


PK = Pink
 BN = Brown
 GY = Grey
 RD = Red
 YE = Yellow
 BU = Blue
 GN = Green
 WH = White

Note: In environments subject to electrical interference, it is recommended to earth the encoder base using one of the fixing screws.

Connector version encoders (1)

M23, 12-pin connector connections

Male connector on encoder (pin view)



| Pin number | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|---------------|----------------|----|---|----------------|---|----------------|---|---|---|----|----|----|
| Signal Supply | A ⁻ | +V | 0 | 0 ⁻ | B | B ⁻ | R | A | R | 0V | 0V | +V |

Note: In environments subject to electrical interference, it is recommended to earth the encoder base using one of the fixing screws.
 R = reserved, do not connect.

(1) Connect each unused channel to 0 V in series with a 10 kΩ resistor.

Incremental encoders

OsiSense XCC


Ø 40 mm, Ø 58 mm and Ø 90 mm encoders

Resolutions

Resolutions for parameterable Ø 58 mm encoders XCC1510PSM●●● and XCC1514TSM●●●

Simple multiplication of the basic resolution of the disc using dip switches (1)
(Plastic Ø 2.5 screwdriver recommended).

The factory setting is for factor X1.

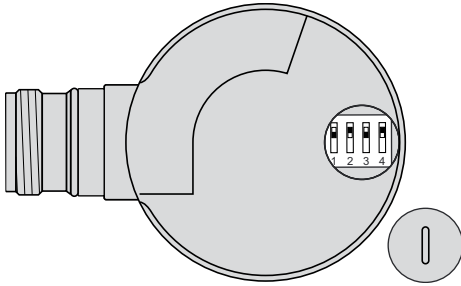

on ↑

| Interpolation factor | Basic resolution | Position of dip switches | | | | |
|----------------------|-----------------------|------------------------------|---|---|---|--|
| | | 1 | 2 | 3 | 4 | |
| Counting Speed | 256 360 500 1024 5000 | | | | | |
| x 1 | x 1 | 256 360 500 1024 5000 | | | | |
| x 2 | x 2 | 512 720 1000 2048 10,000 | | | | |
| x 3 | x 3 | 768 1080 1500 3072 15,000 | | | | |
| x 4 | x 4 | 1024 1440 2000 4096 20,000 | | | | |
| x 5 | - | 1280 1800 2500 5120 25,000 | | | | |
| x 8 | - | 2048 2880 4000 8192 40,000 | | | | |
| x 10 | - | 2560 3600 5000 10,240 50,000 | | | | |
| x 12 | - | 3072 4320 6000 12,288 60,000 | | | | |
| x 16 | - | 4096 5760 8000 16,384 80,000 | | | | |

(1) Setting the switches to other configurations will result in the encoder providing an unpredictable resolution.


| Environment | | | XCC2506P●●●●● | XCC2510P●●●●● | XCC2510S●●●●● | XCC2514T●●●●● |
|--|---|----|--|---|----------------------|---------------------|
| Encoder type | | | CE | | | |
| Conformity | | | | | | |
| Temperature | Operation (housing) | °C | - 20...+ 90 | - 20...+ 90 | - 20...+ 90 | - 20...+ 90 |
| | Storage | °C | - 30...+ 95 | - 30...+ 95 | - 40...+ 100 | - 30...+ 95 |
| Degree of protection | Conforming to IEC 60529 | | IP 65 | IP 65 (IP 67 with collar option XCCRB3) | IP 68 / IP 69K | IP 65 |
| Vibration resistance | Conforming to IEC 60068-2-6 | | 10 gn (f = 55...2 kHz) | | | |
| Shock resistance | Conforming to IEC 60068-2-27 | | 30 gn, duration 11 ms | | | |
| Resistance to electromagnetic interference | Electrostatic discharges | | Conforming to IEC 61000-4-2: level 3, 8 kV air; 4 kV contact | | | |
| | Radiated electromagnetic fields (electromagnetic waves) | | Conforming to IEC 61000-4-3: level 3, 10 V/m | | | |
| | Fast transients (Start/Stop interference) | | Conforming to IEC 61000-4-4: level 3, 2 kV (1 kV for inputs/outputs) | | | |
| | Surge withstand | | Conforming to IEC 61000-4-5: level 2, 1 kV | | | |
| Materials | Base | | Aluminium | | Stainless steel 316L | Aluminium |
| | Housing | | Zamak | | Stainless steel 316L | Zamak |
| | Shaft | | Stainless steel 303 | | Stainless steel 316L | Stainless steel 303 |
| | Ball bearings | | 6000 | | | 6803ZZ |
| | Shaft seal | | - | | Teflon ring | - |
| | | | | | | |

| Mechanical characteristics | | | Ø 6, solid shaft (g7) | Ø 10 mm, solid shaft | Ø 10 mm, solid shaft | Ø 14, through shaft (H7) |
|----------------------------|------------|-------------------|-----------------------|----------------------|----------------------|--------------------------|
| Shaft type | | | | | | |
| Maximum rotational speed | Continuous | | 9000 rpm | 9000 rpm | 3000 rpm | 6000 rpm |
| Shaft moment of inertia | | g.cm ² | 10 | 10 | 12 | 22 |
| Torque | | N.cm | 0.4 | 0.4 | 9 | 0.6 |
| Maximum load | Radial | daN | 10 | 10 | 25 | 5 |
| | Axial | daN | 5 | 5 | 50 | 2 |


| Electrical characteristics | | | |
|--|------------|-----|--|
| Connection | Connector | | Encoders with parallel output stage types KG (N), KB: M23, 16-pin male connector (2 m TPU cable for XCC2510S●●●●). Encoders with SSI output stage types SB (N), SG (N): M23, 12-pin male connector. (2 m PUR cable for XCC2510S●●●●). |
| Frequency | | kHz | Encoders with parallel output stage types KG (N), KB: 100 kHz on LSB (Least Significant Bit) Encoders with SSI output stage types SB (N), SG (N): 100 kHz to 1 MHz clock |
| Encoders with type KB and KG (N) output stage: push-pull output driver, Gray code | | | |
| Supply voltage | | | ≡ 11...30 V Maximum ripple: 500 mV. (For XCC2510SPA81●●●●: 5...30 V. Maximum ripple 200 mV, if supply voltage < 6 V; 500 mV, if supply voltage ≥ 6V). |
| Current consumption, no-load | | mA | 100 maximum |
| Protection | | | Against short-circuits and reverse polarity |
| Output current | | mA | 20 maximum |
| Output levels (for U supply = 30 V) | Low level | | 0.5 V maximum (I _s = 20 mA) |
| | High level | | V supply - 2.5 V minimum (I _s = 20 mA) |

Schemes

Type KB and KG (N) output stage



KB and KG (N) DIRECTION input

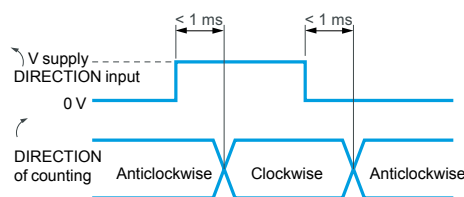


Electrical characteristics (continued)

Encoders with type SB (N) or SG (N) output stage: SSI output without parity, 13-bit clock, 11...30 V supply, binary code (SB) or Gray code (SG)


| | | |
|------------------------------|----|---|
| Supply voltage | | 11...30 V. Maximum ripple: 500 mV |
| Current consumption, no-load | mA | 100 |
| Protection | | Against short-circuits and reverse polarity |
| Output level | | I _{data} = 20 mA VOD > 2 V |

Schemes


RS 422 data output



Isolated clock input

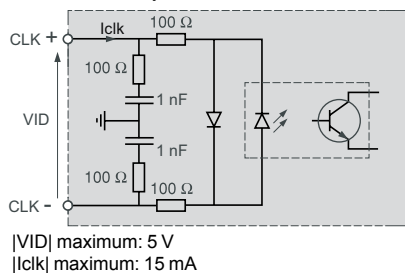

DIRECTION input

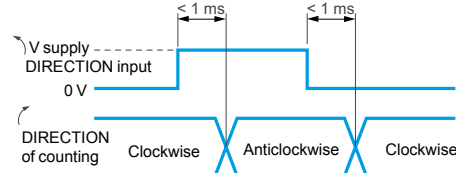

References

105173




XCC2506PS81●●●

120311B



XCC2510SPA81●GN

514214



XCCR158RDA●●

| Resolution | Connection method (1) | Output stage type (2) | Supply voltage | Reference | Weight kg |
|---|-------------------------------|---------------------------|----------------|---------------------|-----------|
| Solid shaft, Ø 6 mm | | | | | |
| 8192 points | Connector, radial M23 male | Push-pull, 13-bit, binary | 11...30 V | XCC2506PS81KB | 0.495 |
| | | Push-pull, 13-bit, Gray | 11...30 V | XCC2506PS81KGN | 0.495 |
| | | SSI, 13-bit, binary | 11...30 V | XCC2506PS81SBN | 0.490 |
| | | SSI, 13-bit, Gray | 11...30 V | XCC2506PS81SGN | 0.490 |
| Solid shaft, Ø 10 mm | | | | | |
| 8192 points | Connector, radial M23 male | Push-pull, 13-bit, binary | 11...30 V | XCC2510PS81KB | 0.465 |
| | | Push-pull, 13-bit, Gray | 11...30 V | XCC2510PS81KGN | 0.465 |
| | | SSI, 13-bit, binary | 11...30 V | XCC2510PS81SBN | 0.460 |
| | | SSI, 13-bit, Gray | 11...30 V | XCC2510PS81SGN | 0.460 |
| | Cable (2 m) | Push-pull, Gray | 5...30 V | XCC2510SPA81KGN (4) | 0.915 |
| | | SSI, 13-bit, Gray | 5...30 V | XCC2510SPA81SGN (4) | 0.925 |
| Through shaft, Ø 14 mm (3) | | | | | |
| 8192 points | Connector, radial M23 male | Push-pull, 13-bit, binary | 11...30 V | XCC2514TS81KB | 0.435 |
| | | Push-pull, 13-bit, Gray | 11...30 V | XCC2514TS81KG | 0.435 |
| | | SSI, 13-bit, binary | 11...30 V | XCC2514TS81SB | 0.430 |
| | | SSI, 13-bit, Gray | 11...30 V | XCC2514TS81SG | 0.430 |
| Reduction collars for encoders with through shaft, Ø 14 mm | | | | | |
| For use with | | Diameter | Reference | Weight kg | |
| Encoders with through shaft XCC2514TS81●● | | Ø 6 mm | XCCR158RDA06 | 0.015 | |
| | | Ø 8 mm | XCCR158RDA08 | 0.010 | |
| | | Ø 10 mm | XCCR158RDA10 | 0.010 | |
| | | Ø 12 mm | XCCR158RDA12 | 0.010 | |

(1) For female connector use:

- XZCC23FDP120S for encoders type SBN and SGN

- XZCC23FDP160S for encoders type KB and KGN,
or pre-wired connectors (L = 2, 5 and 10 m), see page 35.

(2) For characteristics of the output stage type (indicated by last letter of the reference), see page 22.

(3) Anti-rotation device included with encoder.

(4) Stainless steel 316L version.

Environment

| Encoder type | | XCC2912P●●●●● | XCC2930T●●●●● |
|--|---|--|---------------|
| Conformity | | CE | |
| Temperature | Operation (housing) | °C - 20...+ 85 | |
| | Storage | °C - 40...+ 85 | |
| Degree of protection | Conforming to IEC 60529 | IP 66 | IP 65 |
| Vibration resistance | Conforming to IEC 60068-2-6 | 10 gn (f = 10...2 kHz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 30 gn, duration 11 ms | |
| Resistance to electromagnetic interference | Electrostatic discharges | Conforming to IEC 61000-4-2: level 3, 8 kV air; 4 kV contact | |
| | Radiated electromagnetic fields (electromagnetic waves) | Conforming to IEC 61000-4-3: level 3, 10 V/m | |
| | Fast transients (Start/Stop interference) | Conforming to IEC 61000-4-4: level 3, 2 kV (1 kV for inputs/outputs) | |
| | Surge withstand | Conforming to IEC 61000-4-5: level 2, 1 kV | |
| Materials | Base | Aluminium | |
| | Housing | Zamak | |
| | Shaft | Stainless steel | |
| | Ball bearings | 6001ZZ | 6807 |

Mechanical characteristics


| | | | |
|--------------------------|------------|-----------------------------|--------------------------|
| Shaft type | | Ø 12, solid shaft (g6) | Ø 30, through shaft (H7) |
| Maximum rotational speed | Continuous | 6000 rpm | 3600 rpm |
| Shaft moment of inertia | | g.cm² 150 | 500 |
| Torque | | N.cm 1 | 2.5 |
| Maximum load | Radial | daN 20 | 8 |
| | Axial | daN 10 | 5 |

Electrical characteristics


| | | | |
|--|------------|--|--|
| Connection | Connector | Encoders with parallel output stage types KB (N), KG (N): M23, 16-pin male connector. Encoders with SSI output stage types SB (N), SG (N): M23, 12-pin male connector | |
| Frequency | | Encoders with parallel output stage types KB (N), KG (N): 100 kHz on LSB (Least Significant Bit) Encoders with SSI output stage types SB (N), SG (N): 100 kHz to 1 MHz clock | |
| Supply voltage | | Encoders with type KB (N) or KG (N) output stage: push-pull output driver, 11...30 V supply, binary code KB (N) or Gray code KG (N) --- 11...30 V. Maximum ripple: 500 mV (For XCC2510S●●●: 5...30 V. Maximum ripple 200 mV, if supply voltage < 6 V; 500 mV, if supply voltage ≥ 6V). | |
| Current consumption, no-load | | mA 100 maximum | |
| Protection | | Against short-circuits and reverse polarity | |
| Output current | | mA 20 maximum | |
| Output levels (for U supply = 30 V) | Low level | 0.5 V maximum (I _s = 20 mA) | |
| | High level | V supply - 3 V minimum (I _s = 20 mA) | |

Schemes

Type KB (N) and KG (N) output stage



KB (N) and KG (N) DIRECTION input

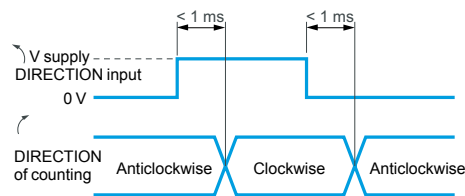


Electrical characteristics (continued)

Encoders with type SB (N) or SG (N) output stage: SSI output without parity, 13-bit clock, 11...30 V supply, binary code SB (N) or Gray code SG (N)

| | | |
|------------------------------|-----------|---|
| Supply voltage | | 11...30 V Maximum ripple: 500 mV |
| Current consumption, no-load | mA | 100 |
| Protection | | Against short-circuits and reverse polarity |
| Output level | | $I_{data} = 20 \text{ mA}$ $ V_{OD} > 2 \text{ V}$ |


Schemes

RS 422 data output




$I_{data} = 20 \text{ mA}$ $|V_{OD}| > 2 \text{ V}$

Isolated clock input

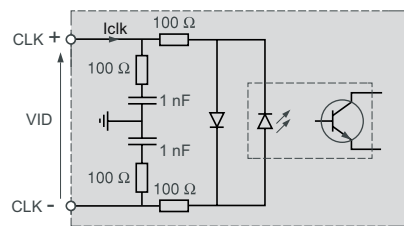

$|V_{ID}|$ maximum: 5 V
 $|I_{clk}|$ maximum: 15 mA

DIRECTION input

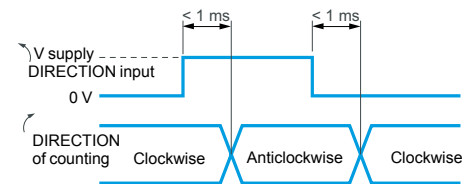

References

105168




XCC2912PS●●●●

105171



XCC2930TS●●●●

5232001



XCCR290RDP●●

| Resolution | Connection method (1) | Output stage type (2) | Supply voltage | Reference | Weight kg |
|---|----------------------------|---------------------------|----------------|----------------|-----------|
| Solid shaft, Ø 12 mm | | | | | |
| 8192 points | Connector, radial M23 male | Push-pull, 13-bit, binary | 11...30 V | XCC2912PS81KBN | 1.365 |
| | | Push-pull, 13-bit, Gray | 11...30 V | XCC2912PS81KGN | 1.365 |
| | | SSI, 13-bit, binary | 11...30 V | XCC2912PS81SBN | 1.370 |
| | | SSI, 13-bit, Gray | 11...30 V | XCC2912PS81SGN | 1.370 |
| Through shaft, Ø 30 mm (3) | | | | | |
| 8192 points | Connector, radial M23 male | Push-pull, 13-bit, binary | 11...30 V | XCC2930TS81KBN | 0.975 |
| | | Push-pull, 13-bit, Gray | 11...30 V | XCC2930TS81KGN | 0.975 |
| | | SSI, 13-bit, binary | 11...30 V | XCC2930TS81SBN | 0.980 |
| | | SSI, 13-bit, Gray | 11...30 V | XCC2930TS81SGN | 0.980 |
| Reduction collars for encoders with through shaft, Ø 30 mm | | | | | |
| For use with | Diameter | Reference | Weight kg | | |
| Encoders with through shaft XCC2930TS81●●●● | Ø 12 mm | XCCR290RDP12 | 0.060 | | |
| | Ø 16 mm | XCCR290RDP16 | 0.060 | | |
| | Ø 20 mm | XCCR290RDP20 | 0.030 | | |
| | Ø 25 mm | XCCR290RDP25 | 0.020 | | |

(1) For female connector use:

- XZCC23FDP120S for encoders type SB (N) and SG (N)
- XZCC23FDP160S for encoders type KB (N) and KG (N), or pre-wired connectors (L = 2, 5 and 10 m), see page 35.

(2) For characteristics of the output stage type (indicated by last letter of the reference), see page 24.

(3) Anti-rotation device included with encoder.

Single turn absolute encoders



OsiSense XCC

Ø 58 mm and Ø 90 mm encoders

Ø 58 mm encoders

XCC2506PS81KB, XCC2506PS81KGN, XCC2506PS81SBN, XCC2506PS81SGN


XCC2510PS81KB, XCC2510PS81KGN, XCC2510PS81SBN, XCC2510PS81SGN

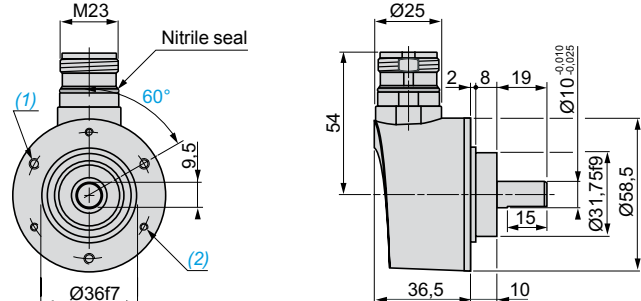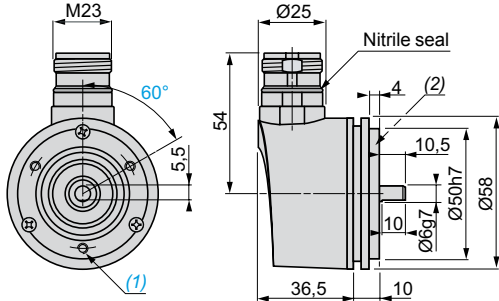

(1) 3 M4 holes at 120° on 42 PCD, depth: 10 mm.
(2) Collar XCCRB1 mounted.


(1) 3 M4 holes at 120° on 48 PCD, depth: 8 mm.
(2) 3 M3 holes at 120° on 48 PCD, depth: 8 mm.

XCC2514TS81KB, XCC2514TS81KGN, XCC2514TS81SB, XCC2514TS81SG

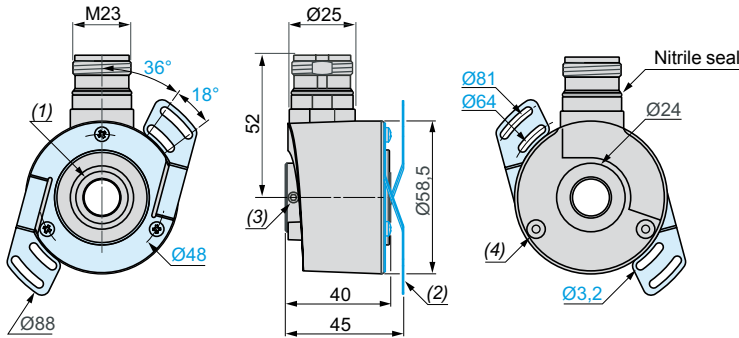

(1) Through shaft, Ø 14 (H7).
(2) Flexible mounting kit, 1 x XCCRF5N mounted.
(3) 2 HC M4 x 4 locking screws.
(4) Hole for M3 x 6 self-threading screw.

XCC2510SPA81KGN, XCC2510SPA81SGN


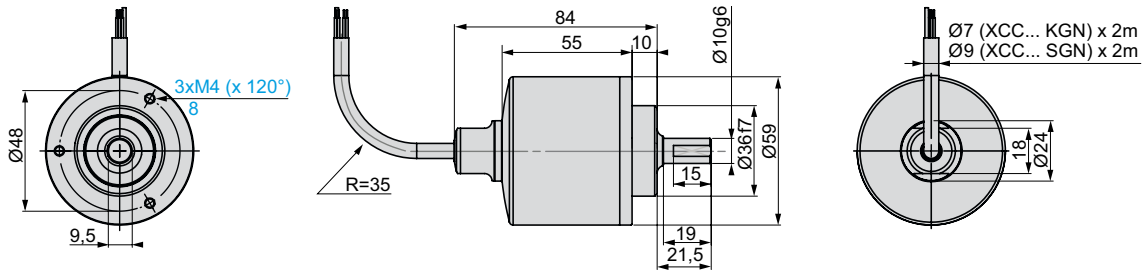


R: minimum bend radius = 35 mm for XCC2510SPA81KGN, 65 mm for XCC2510SPA81SGN.

Ø 90 mm encoders

XCC2912PS81KBN, XCC2912PS81KGN

XCC2930TS81SBN, XCC2930TS81SGN

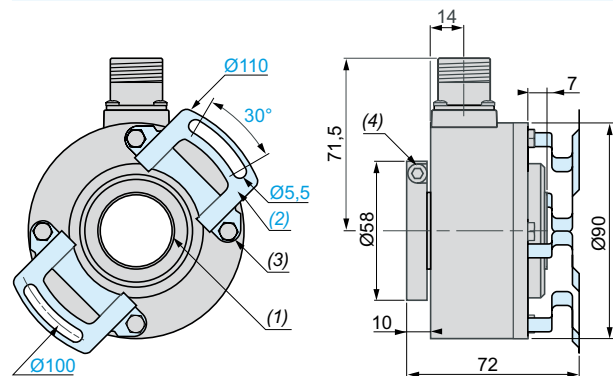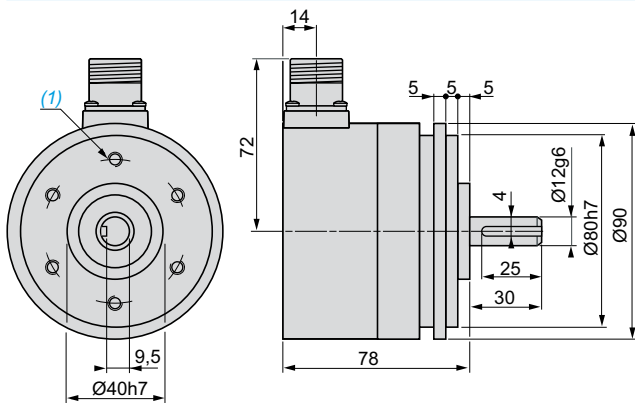


(1) 6 holes M6 x 1 at 120° on 60 PCD, depth: 12 mm maximum.

(1) Through shaft, Ø 30 (H7).
(2) Anti-rotation device, 1 x XCCRF9N, mounted.
(3) 4 M5 x 6 on 78 PCD.
(4) 1 CHC M5 x 12 stainless steel A2 locking screw.

Connector version encoders

Encoders type KB (N) and KG (N)
M23, 16-pin connector, anticlockwise connections

Male connector on encoder (pin view)




| Pin number | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|---------------|-----|-----|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|------------------|
| Signal/Supply | 0 V | + V | d0 | d1 | d2 | d3 | d4 | d5 | d6 | d7 | d8 | d9 | d10 | d11 | d12 | Direction (1) |

If a resolution less than 13 bits (8192 points) is required, only the corresponding number of bits need to be connected:
 Example:
 - D5 to D12 for 8 bits (256 points)
 - D3 to D12 for 10 bits (1024 points)
 - D2 to D12 for 11 bits (2048 points)

(1) ↻ : Clockwise direction, 16 to + V.
 ↻ : Anticlockwise direction, 16 to 0 V.

Encoders type SB (N) and SG (N)
M23, 12-pin connector, anticlockwise connections

Male connector on encoder (pin view)



| Pin number | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|---------------|-----|--------|-------|---|--------------------|---|-----|---|--------|-------|----|----|
| Signal/Supply | 0 V | Data + | Clk + | R | Direction R (2) | R | + V | R | Data - | Clk - | R | |

R = Reserved (do not connect).
 (2) ↻ : Clockwise direction, 5 to 0 V.
 ↻ : Anticlockwise direction, 5 to + V.

Cable version encoders

XCC2510SPA81KGN

| Wire colour | WH White | BN Brown | GN Green | YE Yellow | GY Grey | OG Orange | BU Blue | RD Red |
|---------------|-------------|--------------|--------------------------|--------------------------|---------------------------|--------------------------|---------------------------|------------------------|
| Signal/Supply | 0 V | + V | d0 | d1 | d2 | d3 | d4 | d5 |
| | BK Black | VT Violet | WH/BN White/ brown | WH/GN White/ green | WH/YE White/ yellow | WH/BK White/ black | WH/OG White/ orange | WH/RD White/ red |
| | d6 | d7 | d8 | d9 | d10 | d11 | d12 | Direction (3) |

(3) ↻ : Clockwise direction, to + V.
 ↻ : Anticlockwise direction, to 0 V.

XCC2510SPA81SGN

| Wire colour | BK Black | BN Brown | GN Green | VT Violet | BU Blue | RD Red | OG Orange | YE Yellow |
|---------------|-------------|-------------|-------------|------------------|------------------|-----------|--------------|--------------|
| Signal/Supply | 0 V | Data + | Clock + | Direction (4) | Reset to zero | + V | Data - | Clock - |


(4) ↻ : Clockwise direction, to 0 V.
 ↻ : Anticlockwise direction, to + V.

| Environment | | | |
|--|---|----|--|
| Encoder type | Multiturn absolute | | XCC3506P●●●●● XCC3510P●●●●● XCC3510SPA48●●● XCC3514T●●●●● |
| Conformity | | | CE |
| Temperature | Operation (housing) | °C | - 20...+ 85 |
| | Storage | °C | - 20...+ 85 |
| Degree of protection | Conforming to IEC 60529 | | IP 65 IP 65 (IP 67 with collar option XCCRB3) IP 68 / IP 69K IP 65 |
| Vibration resistance | Conforming to IEC 60068-2-6 | | 10 gn (f = 10...2 kHz) |
| Shock resistance | Conforming to IEC 60068-2-27 | | 30 gn, duration 11 ms |
| Resistance to electromagnetic interference | Electrostatic discharges | | Conforming to IEC 61000-4-2: level 3, 8 kV air; 4 kV contact |
| | Radiated electromagnetic fields (electromagnetic waves) | | Conforming to IEC 61000-4-3: level 3, 10 V/m |
| | Fast transients (Start/Stop interference) | | Conforming to IEC 61000-4-4: level 3, 2 kV (1 kV for inputs/outputs) |
| | Surge withstand | | Conforming to IEC 61000-4-5: level 2, 1 kV |
| Materials | Base | | Aluminium Stainless steel 316L Aluminium |
| | Housing | | Steel Stainless steel 316L Steel |
| | Shaft | | Stainless steel 303 Stainless steel 316L Stainless steel 303 |
| | Ball bearings | | 6000 6000 6803ZZ |
| | Shaft seal | | - Teflon ring - |

| Mechanical characteristics | | | |
|----------------------------|------------|---|----------------------------|
| Shaft type | | Ø 6, solid shaft (g7) Ø 10 mm, solid shaft Ø 14, through shaft (H7) | |
| Maximum rotational speed | Continuous | | 6000 rpm 3000 rpm 6000 rpm |
| Shaft moment of inertia | | g.cm² | 10 12 22 |
| Torque | | N.cm | 0.4 9 0.6 |
| Maximum load | Radial | daN | 10 25 5 |
| | Axial | daN | 5 25 2 |


| Electrical characteristics | | | |
|------------------------------|-----------|-----------|---|
| Connection | Connector | | Encoders with SSI output stage types SB (N), SG (N): M23, 12-pin male connector, (2 m PUR cable for XCC3510SPA48●●●). |
| Frequency | | | Encoders with SSI output stage types SB (N), SG (N): 100 to 500 kHz clock |
| Supply voltage | | | --- 11...30 V. Maximum ripple: 500 mV (For XCC3510SPA48●●●: 5...30 V. Maximum ripple 200 mV, if supply voltage < 6 V; 500 mV, if supply voltage ≥ 6V). |
| Current consumption, no-load | | mA | 100 maximum |
| Protection | | | Against short-circuits and reverse polarity |
| Output level | | | I _{data} = 20 mA VOD > 2 V |

Schemes
RS 422 data output




I_{data} = 20 mA |VOD| > 2 V

DIRECTION input

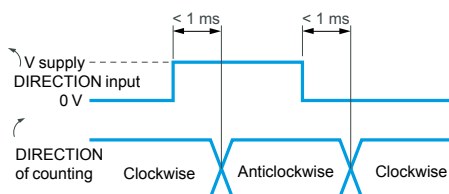


Isolated clock input

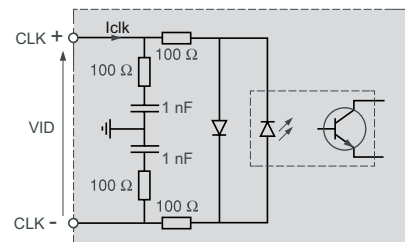

|VID| maximum: 5 V
|I_{clk}| maximum: 15 mA

Input stage - Reset to zero

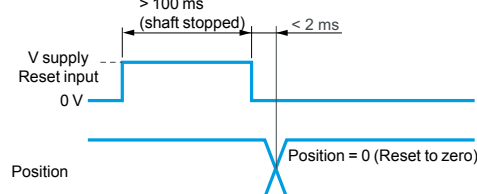

Multiturn absolute encoders

OsiSense XCC


Ø 58 mm encoders, aluminium and stainless steel versions



XCC3506PS84SBN



XCC3510SPA48SGN



XCCR158RDA●●

Ø 58 mm multiturn absolute encoders with SSI output convertible to parallel output

The SSI versions can be converted to a parallel version using the deserialisation connecting cable XCCRM23SUB37●●, see pages 34 and 35.

Solid shaft, Ø 6 mm

| Resolution | Connection method (1) | Output stage type (2) | Supply voltage | Reference | Weight kg |
|---------------------------|-------------------------------|-----------------------|----------------|----------------|-----------|
| 4096 points 8192 turns | Connector, radial M23 male | SSI, 25-bit, Gray | 11...30 V | XCC3506PS48SGN | 0.725 |
| | | SSI, 25-bit, binary | 11...30 V | XCC3506PS48SBN | 0.725 |
| 8192 points 4096 turns | Connector, radial M23 male | SSI, 25-bit, binary | 11...30 V | XCC3506PS84SBN | 0.725 |
| | | SSI, 25-bit, Gray | 11...30 V | XCC3506PS84SGN | 0.725 |

Solid shaft, Ø 10 mm

| Resolution | Connection method (1) | Output stage type (2) | Supply voltage | Reference | Weight kg |
|---------------------------|-------------------------------|-----------------------|----------------|---------------------|-----------|
| 4096 points 8192 turns | Connector, radial M23 male | SSI, 25-bit, Gray | 11...30 V | XCC3510PS48SGN | 0.685 |
| | | SSI, 25-bit, binary | 11...30 V | XCC3510PS48SBN | 0.685 |
| | Cable (2 m) | SSI, 25-bit, binary | 5...30 V | XCC3510SPA48SGN (3) | 0.935 |
| 8192 points 4096 turns | Connector, radial M23 male | SSI, 25-bit, binary | 11...30 V | XCC3510PS84SBN | 0.685 |
| | | SSI, 25-bit, Gray | 11...30 V | XCC3510PS84SGN | 0.685 |

Through shaft, Ø 14 mm (4)

| Resolution | Connection method (1) | Output stage type (2) | Supply voltage | Reference | Weight kg |
|---------------------------|-------------------------------|-----------------------|----------------|---------------|-----------|
| 8192 points 4096 turns | Connector, radial M23 male | SSI, 25-bit, binary | 11...30 V | XCC3514TS84SB | 0.655 |
| | | SSI, 25-bit, Gray | 11...30 V | XCC3514TS84SG | 0.655 |

Reduction collars for encoders with through shaft, Ø 14 mm

| For use with | Diameter | Reference | Weight kg |
|--|----------|---------------|-----------|
| Encoders with through shaft XCC3514TS84●● | Ø 6 mm | XCCR158RDA06 | 0.015 |
| | Ø 8 mm | XCCR158RDA08 | 0.010 |
| | Ø 10 mm | XCCR158RDA10 | 0.010 |
| | Ø 12 mm | XCCR158RDA12 | 0.010 |
| | 0.375" | XCCR158RDAU37 | 0.011 |
| | 0.5" | XCCR158RDAU50 | 0.007 |

(1) For female connector use **XZCC23FDP120S** or pre-wired connectors (L = 2, 5 or 10 m), see page 35.

(2) For characteristics of the output stage type (indicated by last letter of the reference), see page 28.

(3) Stainless steel 316L version.

(4) Anti-rotation device included with encoder.

Environment

| Encoder type | | | XCC3912P●●●●● | XCC3930T●●●●● |
|--|---|----|--|---------------|
| Conformity | | | CE | |
| Temperature | Operation (housing) | °C | -20...+85 | -10...+75 |
| | Storage | °C | -30...+85 | -20...+85 |
| Degree of protection | Conforming to IEC 60529 | | IP 66 | IP 65 |
| Vibration resistance | Conforming to IEC 60068-2-6 | | 10 gn (f = 10...2 kHz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | | 30 gn, duration 11 ms | |
| Resistance to electromagnetic interference | Electrostatic discharges | | Conforming to IEC 61000-4-2: level 3, 8 kV air; 4 kV contact | |
| | Radiated electromagnetic fields (electromagnetic waves) | | Conforming to IEC 61000-4-3: level 3, 10 V/m | |
| | Fast transients (Start/Stop interference) | | Conforming to IEC 61000-4-4: level 3, 2 kV (1 kV for inputs/outputs) | |
| | Surge withstand | | Conforming to IEC 61000-4-5: level 2, 1 kV | |
| Materials | Base | | Aluminium | |
| | Housing | | Zamak | |
| | Shaft | | Stainless steel | |
| | Ball bearings | | 6001ZZ | 6807ZZ |

Mechanical characteristics


| | | | | |
|--------------------------|------------|-------------------|------------------------|--------------------------|
| Shaft type | | | Ø 12, solid shaft (g6) | Ø 30, through shaft (H7) |
| Maximum rotational speed | Continuous | | 6000 rpm | 3600 rpm |
| Shaft moment of inertia | | g.cm ² | 150 | 56 |
| Torque | | N.cm | 1 | 0.8 |
| Maximum load | Radial | daN | 20 | 8 |
| | Axial | daN | 10 | 5 |

Electrical characteristics

| | | | | |
|--|-----------|----|---|--|
| Connection | Connector | | Encoders with SSI output stage types SB (N), SG (N): M23, 12-pin male connector | |
| Frequency | | | Encoders with SSI output stage types SB (N), SG (N): 100 to 500 kHz clock | |
| Encoders with type SBN or SGN (Gray) output stage: SSI output without parity, 25-bit clock, 11...30 V supply, binary code (SB) or Gray code (SG) | | | | |
| Supply voltage | | | 11...30 V Maximum ripple: 500 mV | |
| Current consumption, no-load | | mA | 100 maximum | |
| Protection | | | Against short-circuits and reverse polarity | |
| Output level | | | I _{data} = 20 mA V _{OD} > 2 V | |


Schemes

RS 422 data output




I_{data} = 20 mA |V_{OD}| > 2 V

Isolated clock input

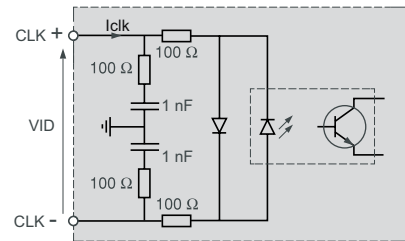


|V_{ID}| maximum: 5 V
|I_{clk}| maximum: 15 mA

DIRECTION input

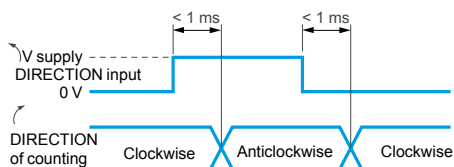


Input stage - Reset to zero

XCC3912P●●●●●

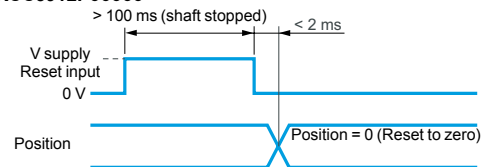

XCC3930T●●●●●

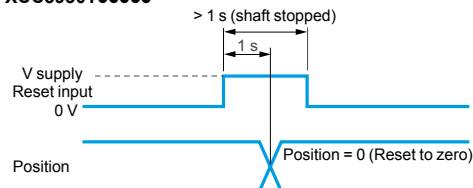

Multiturn absolute encoders

OsiSense XCC

Ø 90 mm encoders


Ø 90 mm multiturn absolute encoders with SSI output convertible to parallel output

The SSI versions can be converted to a parallel version using the deserialisation connecting cable **XCCRM23SUB37●●**, see pages 34 and 35.

Solid shaft, Ø 12 mm

| Resolution | Connection method (1) | Output stage type (2) | Supply voltage | Reference | Weight kg |
|---------------------------|-------------------------------|-----------------------|----------------|-----------------------|-----------|
| 8192 points 4096 turns | Connector, radial M23 male | SSI, 25-bit, binary | 11...30 V | XCC3912PS84SBN | 1.840 |
| | | SSI, 25-bit, Gray | 11...30 V | XCC3912PS84SGN | 1.840 |

105178



XCC3912PS●●●●

Through shaft, Ø 30 mm (3)

| Resolution | Connection method (1) | Output stage type (2) | Supply voltage | Reference | Weight kg |
|---------------------------|-------------------------------|-----------------------|----------------|-----------------------|-----------|
| 8192 points 4096 turns | Connector, radial M23 male | SSI, 25-bit, binary | 11...30 V | XCC3930TS84SBN | 1.060 |
| | | SSI, 25-bit, Gray | 11...30 V | XCC3930TS84SGN | 1.060 |

105179




XCC3930TS●●●●

Reduction collars for encoders with through shaft, Ø 30 mm

| For use with | Diameter | Reference | Weight kg |
|--|----------|---------------------|-----------|
| Encoders with through shaft XCC3930TS84●●●● | Ø 12 mm | XCCR290RDP12 | 0.060 |
| | Ø 16 mm | XCCR290RDP16 | 0.060 |
| | Ø 20 mm | XCCR290RDP20 | 0.030 |
| | Ø 25 mm | XCCR290RDP25 | 0.020 |

523200



XCCR290RDP●●

(1) For female connector use **XZCC23FDP120S** or pre-wired connectors (L = 2, 5 or 10 m), see page 35.


(2) For characteristics of the output stage type (indicated by last letter of the reference), see page 30.

(3) Anti-rotation device included with encoder.

Ø 58 mm encoders

XCC3506PS84SBN, XCC3506PS84SGN


XCC3510PS84SBN, XCC3510PS84SGN

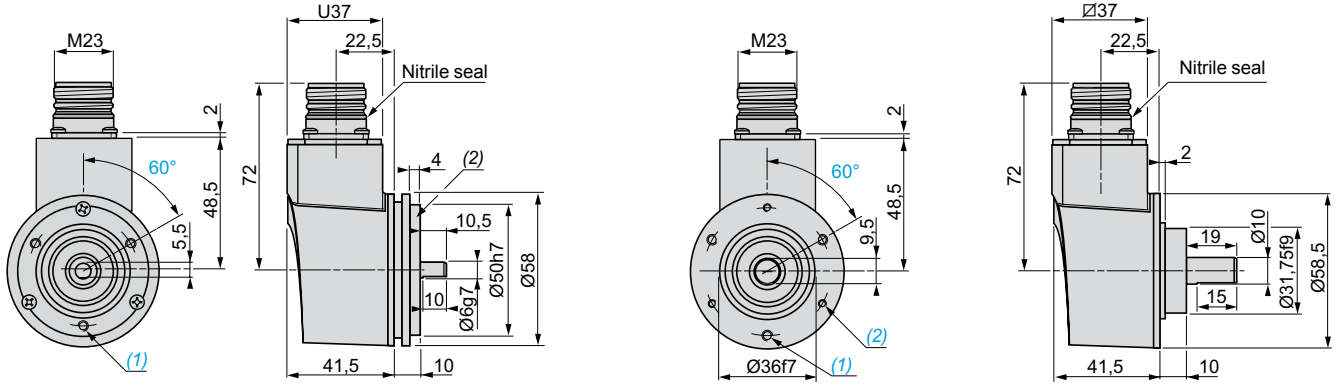

(1) 3 M4 holes at 120° on 42 PCD, depth: 10 mm.
 (2) Collar XCCRB1 mounted.


(1) 3 M4 holes at 120° on 48 PCD, depth: 8 mm.
 (2) 3 M3 holes at 120° on 48 PCD, depth: 8 mm.

XCC3514TS84SB, XCC3514TS84SG

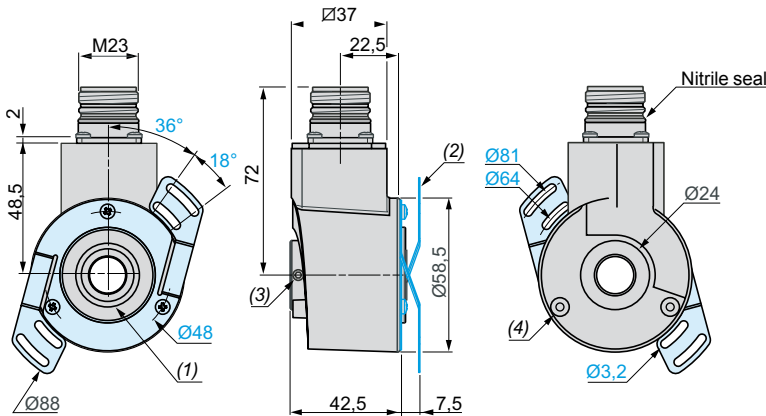

(1) Through shaft, Ø 14 (H7).
 (2) Flexible mounting kit, 1 x XCCRF5N mounted.
 (3) 2 HC M4 x 4 locking screws.
 (4) Hole for M3 x 6 self-threading screw.

XCC3510SPA48SGN

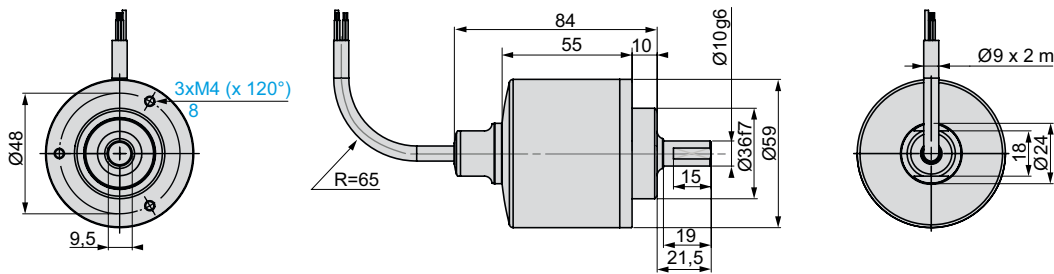


R: minimum bend radius = 65 mm.


Ø 90 mm encoders

XCC3912PS84S●N

XCC3930TS84S●N

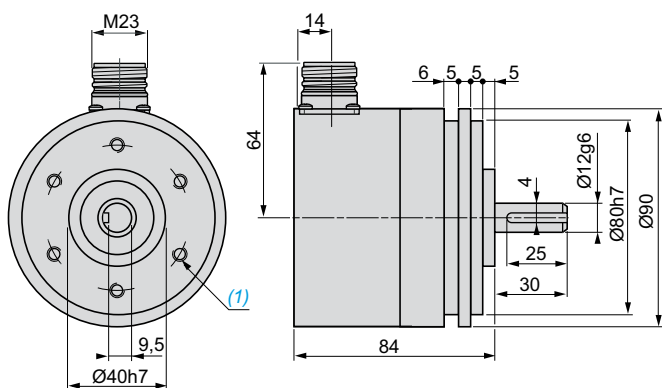

(1) 6 holes M6 x 1 at 120° on 60 PCD, depth: 12 mm maximum.

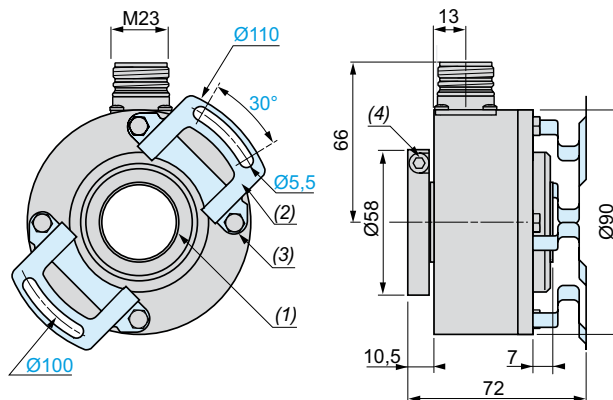


(1) Through shaft, Ø 30 (H7).
(2) Anti-rotation device, 1 x XCCRF9N, mounted.
(3) 4 M5 x 6 on 78 PCD.
(4) 3 HC M5 x 6 stainless steel A2 locking screws.

Connector version encoders

Encoder with SSI output (types SBN and SGN)

M23, 12-pin connector, anticlockwise connections

Male connector on encoder (pin view)



Twisted cable pairs + general shielding must be used.

| Pin number | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|---------------|-----|--------|-------|---|-----------|---------|---|-----|---|--------|-------|----|
| Signal/Supply | 0 V | Data + | Clk + | R | Direction | Reset | R | + V | R | Data - | Clk - | R |
| | | | | | (↻) (1) | to zero | | | | | | |

R = Reserved (do not connect).

(1) ↻ : Clockwise direction, ↺ : Anticlockwise direction.

Selection of code progression direction

The DIRECTION input enables the code progression to match the rotational direction of the encoder shaft (clockwise or anticlockwise).

Clockwise direction: connect pin 5 to 0 V.

Anticlockwise direction: connect pin 5 to + V.

Reset to zero

The RESET input enables the encoder to be set to the zero position.

It is actuated by applying an 11...30 V DC supply to pin 6, whilst the shaft is stopped, for the following times:

- over 100 ms for XCC3506, XCC3510 and XCC3912,
- over 1 s for XCC3930T.

Following a reset to zero, the pin 6 connection must be re-established to 0 V.

Note: In environments subject to electrical interference, it is recommended to earth the encoder base using one of the fixing screws.

Cable version encoder


XCC3510SPA48SGN

| Wire colour | BK | BN | GN | VT | BU | RD | OG | YE |
|---------------|-------|--------|---------|-----------|---------|-----|--------|---------|
| | Black | Brown | Green | Violet | Blue | Red | Orange | Yellow |
| Signal/Supply | 0 V | Data + | Clock + | Direction | Reset | + V | Data - | Clock - |
| | | | | (↻) (2) | to zero | | | |

(2) ↻ : Clockwise direction, to 0 V.

↺ : Anticlockwise direction, to + V.


Connector version multiturn absolute encoders

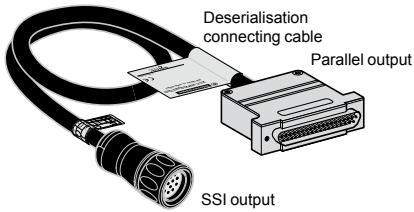

The deserialisation connecting cable **XCCRM23SUB37** (see page 35) enables conversion, by simple connection, of encoders **XCC35** and **XCC39** with SSI output to parallel output.

Characteristics

| | |
|-----------------------|---|
| Supply | 11 to 30 V |
| Encoder input/output | Levels RS 422 |
| Parallel outputs | Push-pull protection against short-circuits |
| Operating temperature | 0 to 50 °C |



Male connector (pin view)

Selection of code progression direction

The DIRECTION input enables the code progression to match the rotational direction of the encoder shaft (clockwise or anticlockwise).

Clockwise direction: connect pin 30 to an 11...30 V DC supply.
Anticlockwise direction: connect pin 30 to 0 V.

Reset to zero

The RESET input enables the encoder to be set to the zero position. It is actuated by applying an 11...30 V DC supply to pin 27 for more than 1 second.

Encoder selection

The SELECT input enables encoder selection when several units are connected in parallel on the same data bus.
Encoder selected: apply 0 V potential to pin 28.
Encoder not selected: apply 11...30 V DC to pin 28.

Data locking

The LATCH input, particularly useful for high speed applications, enables the freezing of the encoder data output whilst reading the code.

Function not actuated: apply 0 V potential to pin 29.

Function actuated: apply 11...30 V DC to pin 29.

36 x 0.14 mm² shielded cable and SUB-D 37-pin end connector connections

| Pin number | Signal | Encoders 4096 points 8192 turns | Encoders 8192 points 4096 turns |
|--------------------|-----------------------|---------------------------------------|---------------------------------------|
| 1 | 2 ⁰ (LSB) | Resolution per revolution | Resolution per revolution |
| 2 | 2 ¹ | | |
| 3 | 2 ² | | |
| 4 | 2 ³ | | |
| 5 | 2 ⁴ | | |
| 6 | 2 ⁵ | | |
| 7 | 2 ⁶ | | |
| 8 | 2 ⁷ | | |
| 9 | 2 ⁸ | | |
| 10 | 2 ⁹ | | |
| 11 | 2 ¹⁰ | | |
| 12 | 2 ¹¹ | | |
| 13 | 2 ¹² | | |
| 14 | 2 ¹³ | Number of revolutions | Number of revolutions |
| 15 | 2 ¹⁴ | | |
| 16 | 2 ¹⁵ | | |
| 17 | 2 ¹⁶ | | |
| 18 | 2 ¹⁷ | | |
| 19 | 2 ¹⁸ | | |
| 20 | 2 ¹⁹ | | |
| 21 | 2 ²⁰ | | |
| 22 | 2 ²¹ | | |
| 23 | 2 ²² | | |
| 24 | 2 ²³ | | |
| 25 | 2 ²⁴ (MSB) | | |
| 26 | R | | |
| 27 | Reset to zero | | |
| 28 | Select | | |
| 29 | Latch | | |
| 30 | Direction (1) (↻) | | |
| 31, 32, 33, 34, 35 | R | | |
| 36 | + V | | |
| 37 | 0 V | | |


R = Reserved, do not connect

(1) (↻) : clockwise direction, (↺) : anticlockwise direction.


Note: In environments subject to electrical interference, it is recommended to earth the encoder base using one of the fixing screws.

Schemes

LATCH input




DIRECTION input

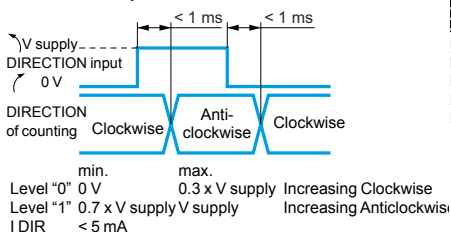


PUSH-PULL

Supply: 11 to 30 V
Maximum ripple: 500 mV
Protection against reverse polarity
Max. no-load consumption: 50 mA (30 mA typical on 24 V)




Max. current: 20 mA
Level "0" max.: 1.5 V
Level "1" min.: V supply - 2.5 V
Protection against short-circuits
NPN/PNP compatible

SELECT input



Input stage - Reset to zero

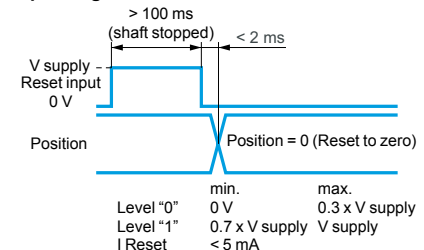


Note: Do not neglect the LATCH and SELECT inputs. Connecting them to 0 V makes the outputs active.


Rotary encoders

OsiSense XCC

Connection accessories



XZCC23FMDP120S



XZCCHFDM370S



XCCRM23SUB37PG



XCCPM23161L2

| Cables | | | | | |
|--|--|--|------|-------------|-----------|
| Description | For encoders | Number of wires/c.s.a. | Ø mm | Reference | Weight kg |
| Shielded cables Length: 100 m UL/CSA | Incremental | 10 wires/0.14 mm ² | 6 | XCCR X 10 | 5.000 |
| | Absolute, single turn // | 16 wires/0.14 mm ² | 6.8 | XCCR X 16 | 5.600 |
| | Absolute, single turn and multiturn SSI, and incremental | 1 twisted pair of 0.50 mm ² wires and 3 twisted pairs of 0.14 mm ² wires | 8.6 | XCCR X S8 | 11.750 |

| Connectors | | | | | |
|---------------------------------|--|----------------|----------|----------------|-----------|
| Description | For use with | Number of pins | Type | Reference | Weight kg |
| M23 female connectors | Encoders Incremental, absolute SSI | 12 | Straight | XZCC23FDP120S | 0.040 |
| | Absolute encoders, single turn parallel | 16 | Straight | XZCC23FDP160S | 0.040 |
| Connector kit 1 female + 1 male | SSI jumper cable or incremental encoders | – | – | XZCC23FMDP120S | 0.090 |
| SUB-D 37-pin female connector | Absolute encoders, multiturn parallel | 37 | Straight | XZCCHFDM370S | 0.115 |

| Deserialisation jumper cables (1) | | | |
|---|-----------------------------|----------------|-----------|
| Description | Type | Reference | Weight kg |
| M23 F - SUB-D37 M jumper cables, straight M23, cable length 0.5 m | SSI Gray//Gray PNP (PG) | XCCRM23SUB37PG | 0.225 |
| | SSI Gray//Gray NPN (NG) | XCCRM23SUB37NG | 0.225 |
| | SSI Binary//Binary PNP (PB) | XCCRM23SUB37PB | 0.225 |
| | SSI Binary//Binary NPN (NB) | XCCRM23SUB37NB | 0.225 |

| Pre-wired connectors | | | | | |
|----------------------|----------------------------------|--------|---------------|-----------|--|
| Description | Number of wires | Length | Reference | Weight kg | |
| M23 F straight | 8 wires Absolute SSI | 2 m | XCCPM23122L2 | 0.190 | |
| | | 5 m | XCCPM23122L5 | 0.470 | |
| | | 10 m | XCCPM23122L10 | 0.900 | |
| | 10 wires Incremental | 2 m | XCCPM23121L2 | 0.160 | |
| | | 5 m | XCCPM23121L5 | 0.330 | |
| | | 10 m | XCCPM23121L10 | 0.620 | |
| | 16 wires Absolute single turn // | 2 m | XCCPM23161L2 | 0.175 | |
| | | 5 m | XCCPM23161L5 | 0.415 | |
| | | 10 m | XCCPM23161L10 | 0.790 | |

(1) See General, page 7.


Pre-wired connector connections

| XCCPM23122L● | | |
|--------------|----------|--------|
| Pin | Function | Colour |
| 1 | 0V | BK |
| 2 | Data (+) | BN |
| 3 | Clk (+) | GN |
| 4 | R | – |
| 5 | ⌚ | VT |
| 6 | Reset | BU |
| 7 | R | – |
| 8 | +V | RD |
| 9 | R | – |
| 10 | Data (-) | OG |
| 11 | Clk (-) | YE |
| 12 | R | – |

| XCCPM23121L● | | |
|--------------|----------|--------|
| Pin | Function | Colour |
| 1 | A/ | BN |
| 2 | V Supply | RD |
| 3 | Top 0 | VT |
| 4 | Top 0/ | BU |
| 5 | B | YE |
| 6 | B/ | OG |
| 7 | R | – |
| 8 | A | GN |
| 9 | R | – |
| 10 | Gnd | BK |
| 11 | Gnd | WH |
| 12 | V Supply | GY |


| XCCPM23161L● | | |
|--------------|----------|--------|
| Pin | Function | Colour |
| 1 | Gnd | WH |
| 2 | V Supply | BN |
| 3 | d0 | GN |
| 4 | d1 | YE |
| 5 | d2 | GY |
| 6 | d3 | OG |
| 7 | d4 | BU |
| 8 | d5 | RD |
| 9 | d6 | BK |
| 10 | d7 | VT |
| 11 | d8 | WH/BN |
| 12 | d9 | WH/GN |
| 13 | d10 | WH/YE |
| 14 | d11 | WH/BK |
| 15 | d12 | WH/OG |
| 16 | ⌚ | WH/RD |

Direction of rotation for pin 5



R: reserved, do not connect

Direction of rotation for pin 16



| Shaft couplings with spring (1) | | |
|---------------------------------|---------|---------------------|
| Maximum torque | N.cm | 300 |
| Maximum angular misalignment | | 5° |
| Maximum radial misalignment | mm | ± 1.5 |
| Materials | Collars | Zamak |
| | Spring | Nickel plated steel |
| Compression/Expansion | mm | ± 1 maximum |

| Homokinetic (flexible) shaft couplings with bellows | | |
|---|---------------|-----------------|
| Maximum torque | N.cm | 80 |
| Maximum angular misalignment | | 4° |
| Maximum lateral misalignment | mm | ± 0.3 |
| Maximum axial misalignment | mm | ± 0.5 |
| Materials | Bellows | Stainless steel |
| | Fixing collar | Aluminium |
| | Screws | Stainless steel |

| Elastic monobloc shaft couplings | | |
|----------------------------------|------|----------------------------------|
| Maximum torque | N.cm | 20 |
| Maximum angular misalignment | | ± 2.5° |
| Maximum radial misalignment | mm | ± 0.3 |
| Compression/Expansion | mm | ± 2 maximum |
| Materials | | Glass fibre reinforced polyamide |

References

105191



XCCRAR0606

105192



XCCRAS0606

806309



XCCRAE0606

| Shaft couplings (for encoders with solid shaft) | | | | | |
|---|-------------------------------------|------------------------------|------------------|------------|------------|
| Type | Bore diameter (encoder side) | Bore diameter (machine side) | Reference | Weight kg | |
| With spring (1) | 6 mm | 6 mm | XCCRAR0606 | 0.125 | |
| | | 8 mm | XCCRAR0608 | 0.125 | |
| | | 10 mm | XCCRAR0610 | 0.125 | |
| | | 12 mm | XCCRAR0612 | 0.120 | |
| | | 14 mm | XCCRAR0614 | 0.120 | |
| | | 16 mm | XCCRAR0616 | 0.120 | |
| | 10 mm | 8 mm | XCCRAR1008 | 0.120 | |
| | | 10 mm | XCCRAR1010 | 0.120 | |
| | | 12 mm | XCCRAR1012 | 0.110 | |
| | | 14 mm | XCCRAR1014 | 0.110 | |
| | | 16 mm | XCCRAR1016 | 0.105 | |
| | | 12 mm | 8 mm | XCCRAR1208 | 0.110 |
| | 12 mm | | XCCRAR1212 | 0.110 | |
| | 14 mm | | XCCRAR1214 | 0.105 | |
| | 16 mm | | XCCRAR1216 | 0.100 | |
| | Homokinetic (flexible) with bellows | | 6 mm | 6 mm | XCCRAS0606 |
| 8 mm | | | | XCCRAS0608 | 0.020 |
| 10 mm | | XCCRAS0610 | | 0.020 | |
| 12 mm | | XCCRAS0612 | | 0.015 | |
| 0.25" | | XCCRAS06U25 | | 0.018 | |
| 0.375" | | XCCRAS06U37 | | 0.016 | |
| 10 mm | | 8 mm | XCCRAS1008 | 0.015 | |
| | | 10 mm | XCCRAS1010 | 0.015 | |
| | | | XCCRAS1010S (2) | 0.015 | |
| | | 12 mm | XCCRAS1012 | 0.015 | |
| | | | XCCRAS1012S (2) | 0.015 | |
| | | 0.25" | XCCRAS10U25 | 0.016 | |
| 12 mm | | 0.375" | XCCRAS10U37 | 0.014 | |
| | | | XCCRAS10U37S (2) | 0.014 | |
| | | 8 mm | XCCRAS1208 | 0.010 | |
| | | 12 mm | XCCRAS1212 | 0.010 | |
| | 0.25" | XCCRAS12U25 | 0.015 | | |
| | 0.375" | XCCRAS12U37 | 0.013 | | |
| Elastic, monobloc | 6 mm | 0.5" | XCCRAS12U50 | 0.012 | |
| | | 6 mm | XCCRAE0606 | 0.010 | |

(1) Not recommended for resolutions higher than 500 points.

(2) Stainless steel 316L version.


Rotary encoders

OsiSense XCC


Mounting and fixing accessories




XCCRF●




XCCRE9SN




XCCRE●R



XCCRB1



XCCRG●



XCCRB2



XCCR158RDA08



XCCR290RDP20

Anti-rotation devices (for encoders with through shaft)

| Description | Features | For encoders | Reference | Weight kg |
|-----------------------|------------------------------------|-----------------------------------|-----------|-----------|
| Flexible mounting kit | Set of 2 flexible fixings + screws | Ø 40 XCC1406T | XCCRF4 | 0.010 |
| | 1 flexible fixing + screws | Ø 58 XCC15●●T, XCC25●●T, XCC3514T | XCCRF5N | 0.020 |
| | Set of 2 flexible fixings + screws | Ø 90 XCC19●●T, XCC29●●T, XCC39●●T | XCCRF9 | 0.030 |

Mounting and fixing accessories (for encoders with solid shaft)

| Description | For encoders | Reference | Weight kg |
|---|-------------------------------------|-----------|-----------|
| Set of 3 eccentric clamps + 3 fixing screws (1) + 3 washers | XCC15●●P, XCC25●●P, XCC35●●P | XCCRG5 | 0.010 |
| | XCC1912P, XCC2912P, XCC3912P | XCCRG9 | 0.030 |
| Plain brackets for Ø 58 (2) | XCC1506, XCC2506 | XCCRE5S | 1.300 |
| | XCC1510P, XCC2510P, XCC3510P | XCCRE5SN | 0.130 |
| Fixing collar (2") for Ø 58 mm | XCC1510, XCC2510, XCC3510 | XCCRB6 | 0.060 |
| Plain brackets for Ø 90 (2) | XCC1912P, XCC2912P, XCC3912P | XCCRE9SN | 0.290 |
| Brackets with play compensator (2) | XCC1510P, XCC2510P, XCC3510PS●●S●● | XCCRE5RN | 0.345 |
| | XCC1912P, XCC2912P, XCC3912P | XCCRE9RN | 0.890 |
| Collar for synchro mounting, for Ø 58 (2) | XCC1510P, XCC2510P, XCC3510P | XCCRB1 | 0.040 |
| Substitution interface collar for Ø 90 (2) | XCC1912P, XCC2912P, XCC3912P | XCCRB2 | 0.175 |
| IP 67 sealed collar for Ø 58 (2) | XCC1510P, XCC2510P, XCC3510PS●●S●●N | XCCRB3 | 0.030 |

Reduction collars for encoders with through shaft


| Description | For use with | Reduction | Reference | Weight kg |
|-------------------|---|-----------------|---------------|-----------|
| Reduction collars | Incremental encoders Ø 58 Absolute single turn encoders Ø 58 Absolute multiturn encoders Ø 58 | 14 mm to 6 mm | XCCR158RDA06 | 0.015 |
| | | 14 mm to 8 mm | XCCR158RDA08 | 0.010 |
| | | 14 mm to 10 mm | XCCR158RDA10 | 0.010 |
| | | 14 mm to 12 mm | XCCR158RDA12 | 0.010 |
| | | 14 mm to 0.375" | XCCR158RDAU37 | 0.011 |
| | | 14 mm to 0.5" | XCCR158RDAU50 | 0.007 |
| | Incremental encoders Ø 90 Absolute single turn and multiturn encoders Ø 90 | 30 mm to 12 mm | XCCR290RDP12 | 0.060 |
| | | 30 mm to 16 mm | XCCR290RDP16 | 0.060 |
| | | 30 mm to 20 mm | XCCR290RDP20 | 0.030 |
| | | 30 mm to 25 mm | XCCR290RDP25 | 0.020 |
| | | 30 mm to 0.375" | XCCR290RDPU37 | 0.080 |
| | | 30 mm to 0.5" | XCCR290RDPU50 | 0.060 |
| | | 30 mm to 0.75" | XCCR290RDPU75 | 0.030 |
| 30 mm to 1" | XCCR290RDPU1 | 0.018 | | |

(1) 3 M3 x 12 screws for XCCRG5, 3 M4 x 25 screws for XCCRG9.

(2) Screws included with brackets and collars.


Shaft couplings

XCCRAR●●●●




| Reference | Ø e | Ø s |
|------------|-------|-------|
| XCCRAR0606 | 6 mm | 6 mm |
| XCCRAR0608 | 6 mm | 8 mm |
| XCCRAR0610 | 6 mm | 10 mm |
| XCCRAR0612 | 6 mm | 12 mm |
| XCCRAR0614 | 6 mm | 14 mm |
| XCCRAR0616 | 6 mm | 16 mm |
| XCCRAR1008 | 10 mm | 8 mm |
| XCCRAR1010 | 10 mm | 10 mm |
| XCCRAR1012 | 10 mm | 12 mm |
| XCCRAR1014 | 10 mm | 14 mm |
| XCCRAR1016 | 10 mm | 16 mm |
| XCCRAR1208 | 12 mm | 8 mm |
| XCCRAR1212 | 12 mm | 12 mm |
| XCCRAR1214 | 12 mm | 14 mm |
| XCCRAR1216 | 12 mm | 16 mm |

XCCRAS●●●●



| Reference | Ø e | Ø s |
|--------------|-----------------|-------|
| XCCRAS0606 | 6 mm | 6 mm |
| XCCRAS0608 | 6 mm | 8 mm |
| XCCRAS0610 | 6 mm | 10 mm |
| XCCRAS0612 | 6 mm | 12 mm |
| XCCRAS1008 | 10 mm | 8 mm |
| XCCRAS1010 | 10 mm | 10 mm |
| XCCRAS1010S | 10 mm | 10 mm |
| XCCRAS1012 | 10 mm | 12 mm |
| XCCRAS1012S | 10 mm | 12 mm |
| XCCRAS1208 | 12 mm | 8 mm |
| XCCRAS1212 | 12 mm | 12 mm |
| XCCRAS06U25 | 6 mm to 0.25" | |
| XCCRAS06U37 | 6 mm to 0.375" | |
| XCCRAS10U25 | 10 mm to 0.25" | |
| XCCRAS10U37 | 10 mm to 0.375" | |
| XCCRAS10U37S | 10 mm to 0.375" | |
| XCCRAS12U25 | 12 mm to 0.25" | |
| XCCRAS12U37 | 12 mm to 0.375" | |
| XCCRAS12U50 | 12 mm to 0.5" | |


XCCRAE0606



Anti-rotation devices (flexible mounting kit)

XCCRF4


Mounting on Ø 40 mm encoder XCC1406T

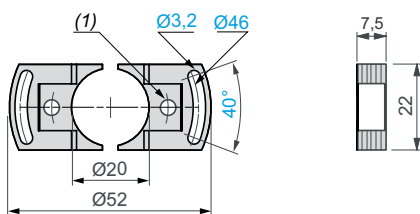

(1) 2 holes Ø 4 at 180° on 30 PCD. TC M4 x 5 screw fixings.

XCCRF5N


Mounting on Ø 58 mm encoders XCC1514T, XCC2514T and XCC3514T

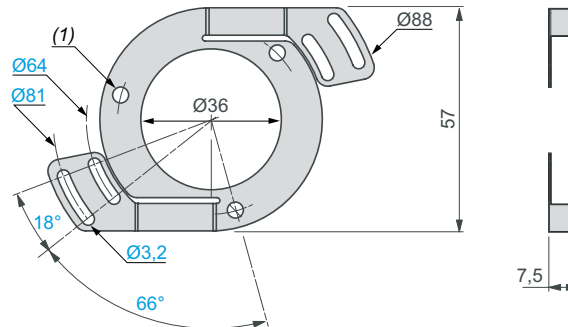

(1) 3 holes Ø 4.1 at 120° on 48 PCD. TC M3 x 6 screw fixings.

XCCRF9

Mounting on Ø 90 mm encoders XCC1930T, XCC2930T and XCC3930T

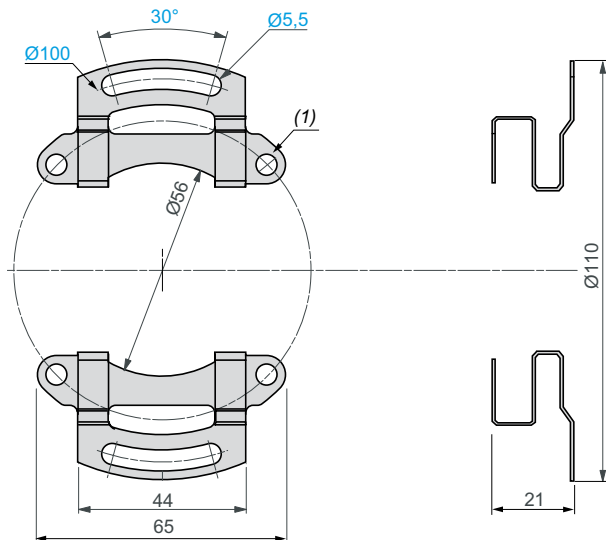


(1) 4 holes Ø 5.2 at 90° on 78 PCD. TH M5 x 6 screw fixings.

Collar kits

XCCRB1


Collar for synchro mounting, for Ø 58 encoders:
XCC15●●P, XCC25●●P and XCC35●●P

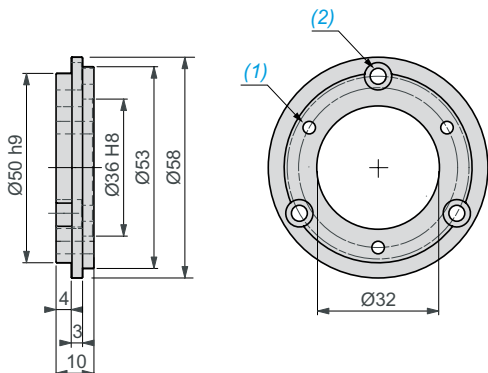

- (1) 3 holes M4 x 0.7 at 120° on 42 PCD. TC M3 x 8 screw fixings.
- (2) 3 counterbored holes for TC M4 x 8 screws at 120° on 48 PCD.

XCCRB2


Interface collar for Ø 90 encoders:
XCC1912P, XCC2912P, XCC3912P

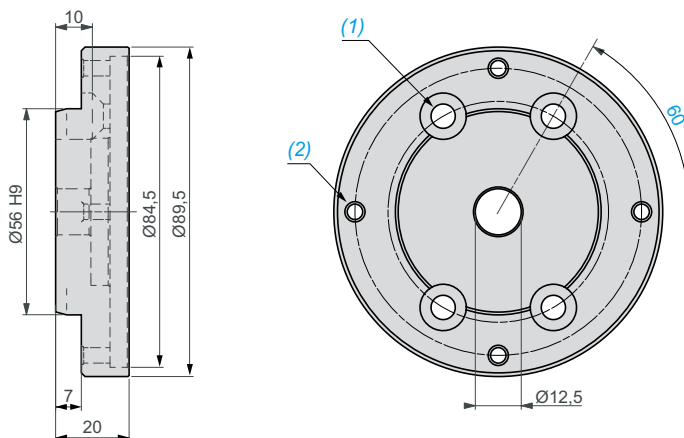

- (1) 4 holes Ø 6.6 at 120° on 60 PCD. Countersunk for TZ M6 x 16 screws.
- (2) 4 holes M5 x 0.8 at 90° on 78 PCD.

XCCRB3


IP 67 sealed collar for Ø 58 encoders:
XCC1510P, XCC2510P and XCC3510PS●●S●N

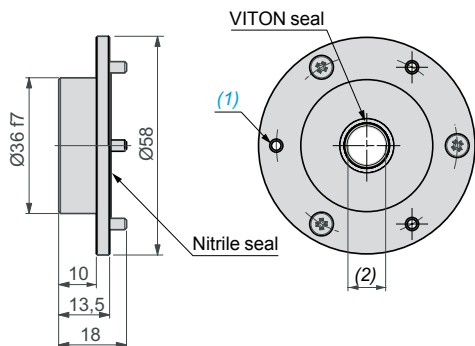

- (1) 3 holes M3 x 0.5 at 120° on 48 PCD. TZ M3 x 8 screw fixings.
- (2) Shaft Ø 10 mm.

Fixing collar XCCRB6


Fixing collar fixation 2" for Ø 58 encoders:
XCC1510, XCC2510 and XCC3510

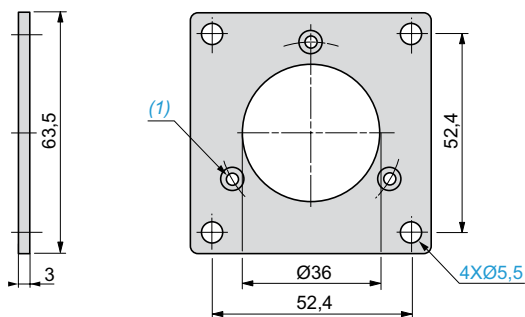

- (1) 3 holes M3.2 at 120° on Ø 48 mm.


Plain brackets

XCCRE5S

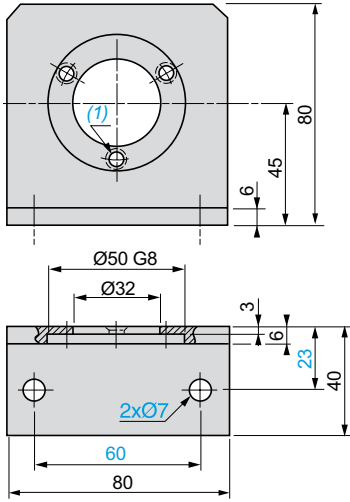

(1) 3 holes Ø 4.5 at 120° on 42 PCD.

XCCRE5SN

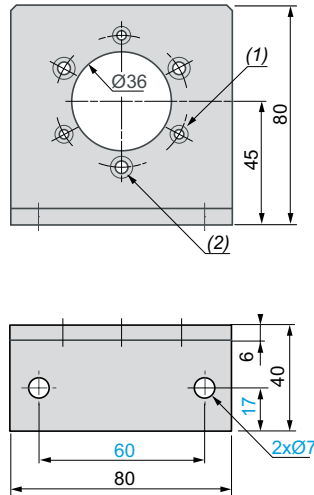


3 CHC M3 x 8 screws included.

(1) 3 counterbored holes for CHC M3 screws at 120° on 48 PCD.

(2) 3 counterbored holes for CHC M4 screws at 120° on 48 PCD.


XCCRE9SN

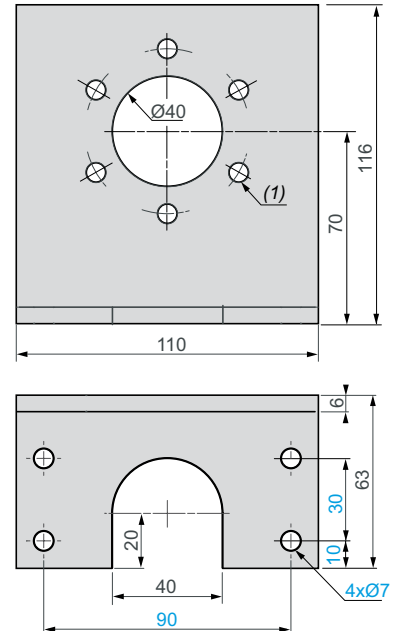

(1) 6 holes Ø 7 for CHC M6 screws at 60° on 60 PCD.

Brackets with play compensator

XCCRE5RN

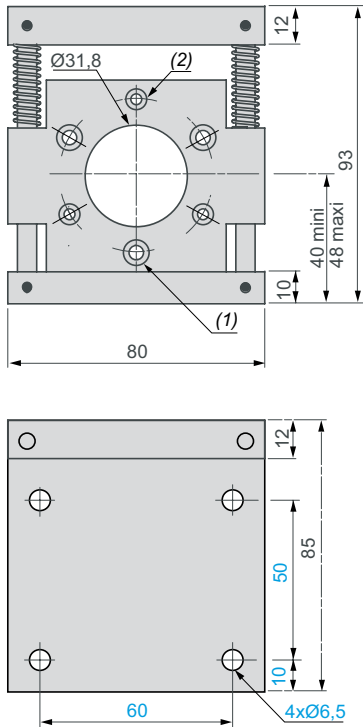


CHC M3 x 12 screws included

(1) 3 counterbored holes for CHC M3 screws at 120° on 48 PCD.

(2) 3 counterbored holes for CHC M4 screws at 120° on 48 PCD.

XCCRE9RN

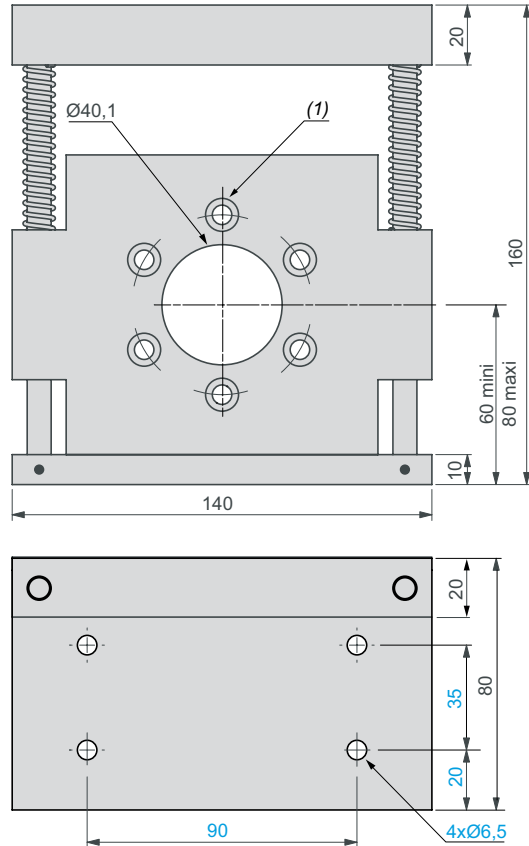


(1) 6 counterbored holes for CHC M6 screws at 120° on 60 PCD.

Reduction collars for through shaft


XCCR158RDA●●

For Ø 58 incremental and absolute single turn and multiturn encoders

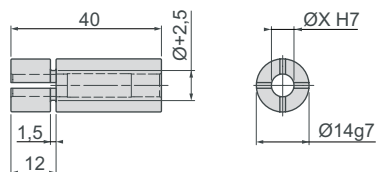

XCCR290RDP●●

For Ø 90 incremental and absolute single turn and multiturn encoders

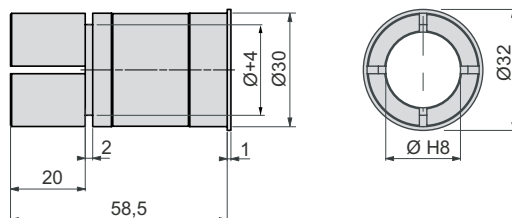

| Reference | Ø |
|---------------|--------|
| XCCR158RDA06 | 6 mm |
| XCCR158RDA08 | 8 mm |
| XCCR158RDA10 | 10 mm |
| XCCR158RDA12 | 12 mm |
| XCCR158RDAU37 | 0.375" |
| XCCR158RDAU50 | 0.5" |

| Reference | Ø |
|--------------|--------|
| XCCR290RDP12 | 12 mm |
| XCCR290RDP16 | 16 mm |
| XCCR290RDP20 | 20 mm |
| XCCR290RDP25 | 25 mm |
| XCCR290RDP37 | 0.375" |
| XCCR290RDP50 | 0.5" |
| XCCR290RDP75 | 0.75" |
| XCCR290RDP1 | 1" |

Presentation


The OsiSense XCC CANopen multiturn absolute Ø 58 mm encoder is designed to meet the requirements for configurations encountered in communicating industrial installations. Models **XCC3510PS84CBN** and **XCC3515CS84CBN** integrate CANopen communication protocols as standard.

The CAN-Bus interface integrated in the absolute rotary encoder supports all CANopen functions. The following modes can be programmed and made operational or stopped: Pooling mode, Cyclic mode and Sync mode. The application specific protocol supports the programming of the following additional functions:

- code sequence,
- resolution per revolution,
- global resolution,
- presets,
- speed and address.

The connection housing ensures simple assembly and addressing. It performs the function of a T coupler and has M12 connectors for the bus incoming and outgoing signals.

The rotary encoder can be supplied via the CANopen bus or by using the dedicated PG9 cable gland. The address of the equipment is adjusted from the rotary switches. Encoders **XCC3510PS84CBN** and **XCC3515CS84CBN** have 2 LEDs located on the rear face of the housing to facilitate monitoring and diagnostics conforming to standard DR303-3 v1.3.0 (CIA). The LEDs provide information regarding the operative mode, bus errors, supply problems.



- 1 2 LEDs
- 2 PG9 cable gland for supply cable
- 3 M12 male connector (CANopen incoming bus)
- 4 M12 female connector (CANopen outgoing bus)
- 5 Encoder shaft

Standards

Encoders **XCC3510PS84CBN** and **XCC3515CS84CBN** conform to:

- standard ISO 11898,
- specifications DS301 V4.02/CAN2.A, DS406 V3.2, DR303-1 V1.7 (cabling and connector), DR303-3 V1.3 (light indicator).

They are CiA certified and meet the requirements of the Schneider Electric interoperability standards.

Encoder setting-up/configuration software

The CANopen bus is configured with the aid of SyCon version 2.9 software, reference SYC SPU LF, to be ordered separately.

The EDS file, reference TEXCC35CBN_0101E.eds, required for encoder configuration can be downloaded from our website www.tesensors.com.

Configurable parameters

■ Transmission speed

Default value: 250 Kbaud, configurable from 10 Kbaud (distance 6700 m) to 1 Mbaud (distance 12 m).

■ Address

defines encoder identification on the bus, 1 to 99. Default value: id = 1. It is defined using 2 coding wheels located in the housing.

■ Resolution

defines the number of points per revolution (0 to 8191).

■ Global resolution

defines the total number of codes of the encoder (0 to 33,554,431).

■ Direction

enables defining of the counting direction of the encoder (increasing clockwise or anticlockwise) in relation to its mechanical position.

■ Reset to X

defines the value of its actual position (reset to X or reset to amount).

Communication modes

■ Pooling mode

The encoder responds to requests from the master. This mode enables programming and reading to the encoder parameters whilst in position.

■ Cyclic mode

The encoder transmits its data cyclically. The transmission period is programmable from 0 to 65,535 ms.

■ Sync mode




The encoder transmits its data when the master sends a synchro.

| Characteristics | | | |
|--|--|---|--|
| Encoder type | | XCC3510PS84CBN | XCC3515CS84CBN |
| Conformity | | CE | |
| Temperature | Operation (housing) | °C | - 40...+ 85 |
| | Storage | °C | - 40...+ 85 |
| Degree of protection | Conforming to IEC 60529 | IP 64 | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 10 gn (f = 10...2 kHz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 100 gn (6 ms, 1/2 sine wave) | |
| Resistance to electromagnetic interference | Electrostatic discharges | Conforming to IEC 61000-4-2: level 2, 4 kV air; 2 kV contact | |
| | Radiated electromagnetic fields (electromagnetic waves) | Conforming to IEC 61000-4-3: level 3, 10 V/m | |
| | Fast transients (Start/Stop interference) | Conforming to IEC 61000-4-4: level 3, 2 kV (1 kV for inputs/outputs) | |
| | Surge withstand | Conforming to IEC 61000-4-5: level 1, 500 V | |
| Materials | Base | Aluminium | |
| | Housing | Aluminium | |
| | Shaft | Stainless steel | |
| | Ball bearings | 6000ZZ1 | 6803ZZ |
| Mechanical characteristics | | | |
| Shaft type | mm | Ø 10, solid shaft (h8) | Ø 15, hollow shaft (F7) |
| Maximum rotational speed | Continuous | 6000 rpm | |
| Shaft moment of inertia | g.cm ² | 30 | |
| Torque | N.cm | 3 | |
| Maximum load | Radial | daN | 11 |
| Electrical characteristics | | | |
| Connection | Connector | CANopen bus network by M12 connector (input: male; output: female), 5-pin, A coding. Supply via PG9 of the encoder | |
| Frequency | kHz | 800 | |
| Supply | Nominal voltage | V | ~ 24 (10-30) Recommended PELV supply (Protective Extra Low Voltage) |
| Current consumption, no-load | mA | 100 maximum | |
| Protection | Against reverse polarity and voltage surges | | |
| Signalling | Green LED: CAN_RUN; red LED: CAN_ERR | | |
| Communication | | | |
| CANopen service | Conformity class | S10 (Transparent Ready) | |
| | Profile | DS406 V3.1, class C2 | |
| | Specifications | ISO 11898, DS301 V4.02/CAN2.A, DR303-1 V1.7, DR303-3 V1.3. | |
| Structure | Speed | Kbps | 10, 20, 50, 125, 250, 500, 800 and 1000 |
| Product certification | CiA Schneider Electric interoperability standards | | |
| Distance depending on speed | 250 m at 250 kbps, 100 m at 500 kbps, 30 m at 800 kbps, 12 m at 1000 kbps | | |

Multiturn absolute encoders on bus

OsiSense XCC

CANopen Ø 58 mm encoders



CANopen Ø 58 mm encoders

| Description | Connection method | Output stage type | Supply voltage | Reference | Weight kg |
|-------------|-------------------|-------------------|----------------|-----------|-----------|
|-------------|-------------------|-------------------|----------------|-----------|-----------|

Solid shaft, Ø 10 mm

| | | | | | |
|---|--|-------------------------|-----------|-----------------------|-------|
| Ø 58 mm multiturn absolute CANopen bus encoder | Radial 2 x M12 connectors A coding 1 x PG9 | CANopen, 25-bit, binary | 11...30 V | XCC3510PS84CBN | 0.560 |
|---|--|-------------------------|-----------|-----------------------|-------|

Hollow shaft, Ø 15 mm (1)

| | | | | | |
|---|--|-------------------------|-----------|-----------------------|-------|
| Ø 58 mm multiturn absolute CANopen bus encoder | Radial 2 x M12 connectors A coding 1 x PG9 | CANopen, 25-bit, binary | 11...30 V | XCC3515CS84CBN | 0.570 |
|---|--|-------------------------|-----------|-----------------------|-------|

Reduction collars for encoders with hollow shaft, Ø 15 mm

| For use with | Diameter | Reference | Weight kg |
|--|----------|----------------------|-----------|
| Encoder with hollow shaft XCC3515CS84CBN | Ø 6 mm | XCCR358RDL06 | 0.040 |
| | Ø 8 mm | XCCR358RDL08 | 0.030 |
| | Ø 10 mm | XCCR358RDL10 | 0.025 |
| | Ø 12 mm | XCCR358RDL12 | 0.020 |
| | Ø 14 mm | XCCR358RDL14 | 0.010 |
| | 0.375" | XCCR358RDLU37 | 0.011 |
| | 0.5" | XCCR358RDLU50 | 0.007 |

Connection accessories for CANopen bus

Connecting cables for CANopen bus

| Description | Length m | Reference | Weight kg |
|---|----------|---------------------|-----------|
| Connecting cables fitted with 2 straight type M12 connectors, A coding | 1 | TCSMCN1M1F1 | 0.080 |
| | 2 | TCSMCN1M1F2 | 0.115 |
| | 5 | TCSMCN1M1F5 | 0.520 |
| | 10 | TCSMCN1M1F10 | 0.520 |

CANopen cables

| Description | Length | Unit reference | Weight kg |
|--|--------|--------------------|-----------|
| Standard CANopen cables conforming to IEC 60332-1 | 50 m | TSXCANCA50 | 4.930 |
| | 100 m | TSXCANCA100 | 8.800 |
| | 300 m | TSXCANCA300 | 24.560 |
| CANopen cables for severe environments (2) or moving installations, CE marking: low smoke emission. Halogen free. No flame propagation (IEC 60332-1). Resistance to oils. | 50 m | TSXCANCD50 | 3.510 |
| | 100 m | TSXCANCD100 | 7.770 |
| | 300 m | TSXCANCD300 | 21.760 |

Shielded connectors, cabled by user

| Description | Type | Unit reference | Weight kg |
|---|----------|---------------------|-----------|
| M12 female connector 5 spring terminals | Straight | XZCC12FDB50R | 0.020 |
| M12 male connector 5 spring terminals | Straight | XZCC12MDB50R | 0.025 |


(1) Anti-rotation device included with encoder.

(2) Severe environment:


- resistance to hydrocarbons, industrial oils, detergents, weld spatter,
- relative humidity up to 100 %,
- saline atmosphere,
- extreme variations in temperature,
- operating temperature between - 10 °C and + 70 °C,
- moving installation.

Dimensions

XCC3510PS84CBN

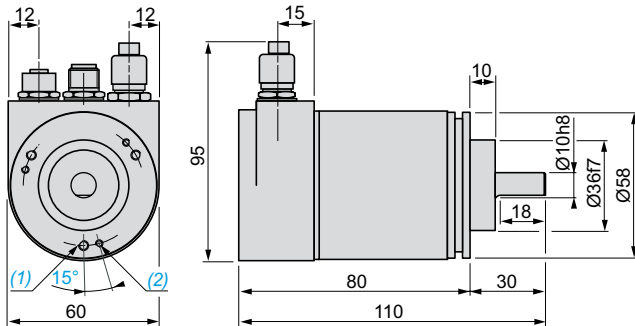

XCC3515CS84CBN



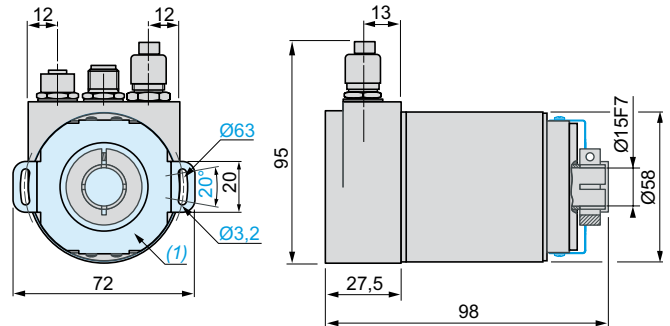


(1) 3 M4 holes at 120° on 48 PCD, depth: 6 mm.
(2) 3 M3 holes at 120° on 48 PCD, depth: 6 mm.

(1) Flexible mounting kit, 1 x XCCRF5B mounted.

Connections

CANopen

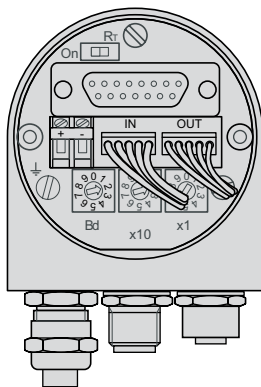

Bus IN
M12 male connector



Bus OUT
M12 female connector

| Pin | 1 | 2 | 3 | 4 | 5 |
|----------|----------|----------|---------|-------|-------|
| Function | CAN_SHLD | (CAN_V+) | CAN_GND | CAN_H | CAN_L |
| Terminal | + | - | | | |
| Function | 24 V | 0 V | | | |

Presentation

The OsiSense XCC PROFIBUS-DP multiturn absolute Ø 58 mm encoder is designed to meet the requirements for configurations encountered in communicating industrial installations. Models **XCC3510PV84FBN** and **XCC3515CV84FBN** integrate PROFIBUS-DP communication protocols as standard.


The PROFIBUS-DP bus interface integrated in the absolute rotary encoder is based on RS 485 transmission and enables speeds of up to 12 Mbps. Exchanges are possible from the master to the encoder. The application specific protocol DP-V0 conforms to the class 2 profile for encoders and supports the following functions:

- code sequence,
- resolution per revolution,
- global resolution,
- presets,
- soft stops,
- speed and address.

The housing of the encoders provides easy access to 2 coding wheels for configuration of the address. 2 LEDs are integrated to facilitate diagnostics. It performs the function of a T coupler with 3 x PG9 cable glands (2 for the bus incoming and outgoing signals, 1 for the encoder supply).

PROFIBUS-DP encoders have 2 LEDs to indicate the encoder status:

- Green LED: "Sta"
- Red LED: "Err".



- 1 2 LEDs
- 2 PG9 cable gland for supply cable
- 3 Encoder shaft

Standards

PROFIBUS-DP encoders **XCC3510PV84FBN** and **XCC3515CV84FBN** conform to:

- international standards IEC 61158 and IEC 61784 for PROFIBUS-DP communication
- the PROFIBUS-DP standard EN 50170 Class 2 in accordance with profile 3.062 V 1.1 for the encoder application.

They are certified by the PNO organisation and meet the requirements of the Schneider Electric interoperability standards.

Encoder setting-up/configuration software

The PROFIBUS-DP bus is configured with the aid of SyCon version 2.9 software, reference SYC SPU LF, to be ordered separately.

The GSD "gsd file" required for encoder configuration can be downloaded from our website www.tesensors.com, under reference TELE4711.GSD.

Configurable parameters

■ Speed

defines the instantaneous speed in 16-bit binary. It can be data according to 1 of 4 modes:

- Steps/10 ms,
- Steps/100 ms,
- Steps/s or rpm.

■ Address

Addressing is performed using 2 coding wheels located in the housing. The addresses possible are 1 to 99.

■ Resolution

defines the number of points per revolution (0 to 8191)

■ Global resolution

defines the total number of codes of the encoder (0 to 33,554,431)

■ Direction

enables defining of the counting direction of the encoder (increasing clockwise or anticlockwise) in relation to its mechanical position

■ 2 soft stops

one high stop and one low stop can be defined and extracted from the position word

■ Reset to X

defines the value of its actual position (reset to X or reset to amount).

Communication modes

2 communication modes are possible:


- simple and fast, cyclic and deterministic exchanges between the master and the encoder,
- acyclic exchanges.

| Characteristics | | | |
|--|---|---|--|
| Encoder type | | XCC3510PV84FBN | XCC3515CV84FBN |
| Conformity | | DIN VDE 0160 | |
| Temperature | Operation (housing) | °C | - 40...+ 85 |
| | Storage | °C | - 40...+ 85 |
| Degree of protection | Conforming to IEC 60529 | IP 64 | |
| Vibration resistance | Conforming to IEC 60068-2-6 | 10 gn (f = 10...2 kHz) | |
| Shock resistance | Conforming to IEC 60068-2-27 | 100 gn (6 ms, 1/2 sine wave) | |
| Resistance to electromagnetic interference | Electrostatic discharges | Conforming to IEC 61000-4-2: level 2, 4 kV air; 2 kV contact | |
| | Radiated electromagnetic fields (electromagnetic waves) | Conforming to IEC 61000-4-3: level 3, 10 V/m | |
| | Fast transients (Start/Stop interference) | Conforming to IEC 61000-4-4: level 3, 2 kV (1 kV for inputs/outputs) | |
| | Surge withstand | Conforming to IEC 61000-4-5: level 1, 500 V | |
| Materials | Base | Aluminium | |
| | Housing | Aluminium | |
| | Shaft | Stainless steel | |
| | Ball bearings | 6000ZZ1 | 6803ZZ |
| Mechanical characteristics | | | |
| Shaft type | mm | Ø 10, solid shaft (h8) | Ø 15, hollow shaft (F7) |
| Maximum rotational speed | | 6000 rpm | |
| Shaft moment of inertia | g.cm ² | 30 | |
| Torque | N.cm | 3 | |
| Maximum load | Radial | daN | 11 |
| Electrical characteristics | | | |
| Connection | Via PG9 | 3 x PG9 entries: - 2 x PG9 entries for the PROFIBUS-DP bus - 1 x PG9, positioned in middle, for external supply (10-30 V) Due to the T integrated in the housing, the supply can be distributed on the bus. Connections are made using screw terminals. | |
| Frequency | | kHz | 800 |
| Supply | Nominal voltage | V | ⎓ 24 (10-30) Recommended PELV supply (Protective Extra Low Voltage) |
| Current consumption, no-load | | mA | 100 |
| Protection | | Against reverse polarity and voltage surges | |
| Signalling | | Green LED: "Sta"; red LED: "Err" | |
| Communication | | | |
| PROFIBUS-DP V0 service | Profile for encoder | 3.062 V1.1. | |
| | Specifications | IEC 61158, IEC 61784, EN 50170 class 2, EN 50254 | |
| Interface | | RS 485 | |
| Speed | | 9.6 Kbps...12 Mbps maximum | |
| Product certification | | PNO Schneider Electric interoperability standards | |

Multiturn absolute encoders on bus

OsiSense XCC

PROFIBUS-DP Ø 58 mm encoders



References

| Description | Connection method | Output stage type | Supply voltage | Reference | Weight kg |
|--|-------------------|-----------------------------|----------------|----------------|-----------|
| Solid shaft, Ø 10 mm | | | | | |
| Ø 58 mm multiturn absolute PROFIBUS-DP encoder Resolution 8192 pts/4096 turns | 3 x PG9 radial | PROFIBUS-DP, 25-bit, binary | 11...30 V | XCC3510PV84FBN | 0.560 |

Hollow shaft, Ø 15 mm (1)

| | | | | | |
|--|----------------|-----------------------------|-----------|----------------|-------|
| Ø 58 mm multiturn absolute PROFIBUS-DP encoder Resolution 8192 pts/4096 turns | 3 x PG9 radial | PROFIBUS-DP, 25-bit, binary | 11...30 V | XCC3515CV84FBN | 0.570 |
|--|----------------|-----------------------------|-----------|----------------|-------|


Reduction collars for encoders with hollow shaft, Ø 15 mm

| For use with | Diameter | Reference | Weight kg |
|---|----------|---------------|-----------|
| Encoder with hollow shaft XCC3515CV84FBN | Ø 6 mm | XCCR358RDL06 | 0.040 |
| | Ø 8 mm | XCCR358RDL08 | 0.030 |
| | Ø 10 mm | XCCR358RDL10 | 0.025 |
| | Ø 12 mm | XCCR358RDL12 | 0.020 |
| | Ø 14 mm | XCCR358RDL14 | 0.010 |
| | Ø 0.375" | XCCR358RDLU37 | 0.011 |
| | Ø 0.5" | XCCR358RDLU50 | 0.007 |


(1) Anti-rotation device included with encoder.

PROFIBUS-DP Ø 58 mm encoders

XCC3510PV84FBN

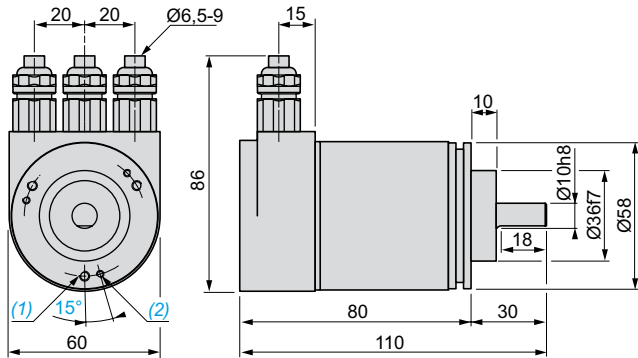

XCC3515CV84FBN



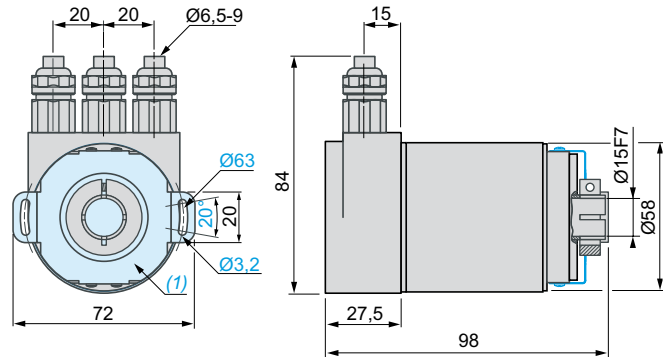


(1) 3 M4 holes at 120° on 48 PCD, depth: 6 mm.
(2) 3 M3 holes at 120° on 48 PCD, depth: 6 mm.

(1) Flexible mounting kit, 1 x XGCRF5B mounted.

Connections

PROFIBUS-DP

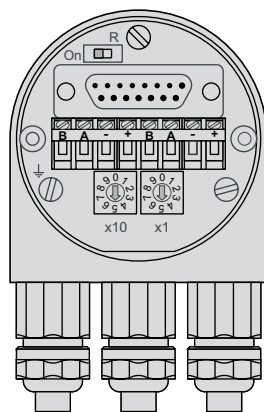

| Terminal | ⏏ | B (left) | A (left) | - | + |
|----------|-------|----------------------|----------------------|-----|---------|
| Function | Earth | Bus line B (Bus in) | Bus line A (Bus in) | 0 V | 11-30 V |
| Terminal | | B (right) | A (right) | - | + |
| Function | | Bus line B (Bus out) | Bus line A (Bus out) | 0 V | 11-30 V |

Homokinetic (flexible) shaft couplings with bellows

| | | |
|------------------------------|---------------|-----------------|
| Maximum torque | N.cm | 80 |
| Maximum angular misalignment | | 4° |
| Maximum lateral misalignment | mm | ± 0.3 |
| Maximum axial misalignment | mm | ± 0.5 |
| Materials | Bellows | Stainless steel |
| | Fixing collar | Aluminium |
| | Screws | Stainless steel |

References

Shaft couplings (for encoders with solid shaft)

| Type | Bore diameter (encoder side) | Bore diameter (machine side) | Reference | Weight kg |
|-------------------------------------|------------------------------|------------------------------|------------|-----------|
| Homokinetic (flexible) with bellows | 10 mm | 8 mm | XCCRAS1008 | 0.015 |
| | | 10 mm | XCCRAS1010 | 0.015 |
| | | 12 mm | XCCRAS1012 | 0.015 |

105192



XCCRAS●●●●

Anti-rotation devices (for encoders with hollow shaft)

| Description | Features | For encoders | Reference | Weight kg |
|-----------------------|----------------------------|-------------------------|-----------|-----------|
| Flexible mounting kit | 1 flexible fixing + screws | CANopen and PROFIBUS-DP | XCCRF5B | 0.010 |

Reduction collars for encoders with hollow shaft

| Description | For use with | Reduction | Reference | Weight kg |
|-------------------|----------------------------------|-----------------|---------------|-----------|
| Reduction collars | CANopen and PROFIBUS-DP encoders | 15 mm to 6 mm | XCCR358RDL06 | 0.040 |
| | | 15 mm to 8 mm | XCCR358RDL08 | 0.030 |
| | | 15 mm to 10 mm | XCCR358RDL10 | 0.025 |
| | | 15 mm to 12 mm | XCCR358RDL12 | 0.020 |
| | | 15 mm to 14 mm | XCCR358RDL14 | 0.010 |
| | | 15 mm to 0.375" | XCCR358RDLU37 | 0.011 |
| | | 15 mm to 0.5" | XCCR358RDLU50 | 0.007 |


105189



XCCR358RDL06

Shaft couplings

XCCRAS●●●●




| Reference | Ø e | Ø s |
|------------|-----|-----|
| XCCRAS1008 | 10 | 8 |
| XCCRAS1010 | 10 | 10 |
| XCCRAS1012 | 10 | 12 |

Anti-rotation device

XCCRF5B

Mounting on Ø 58 mm CANopen and PROFIBUS-DP encoders XCC3510●●●FBN, XCC3510●●●CBN, XCC3515C●●●FBN, XCC3515C●●●CBN

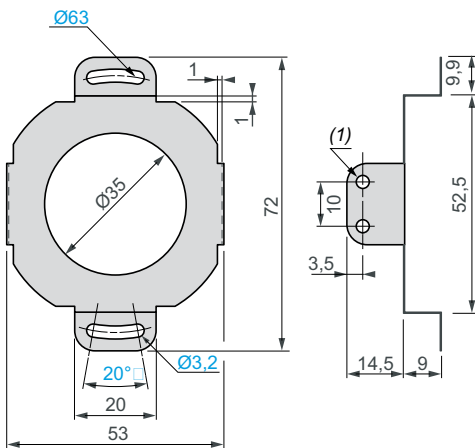


(1) 4 holes Ø 3.2. M3 x 6 screw fixings.

Reduction collars

XCCR358RDL●●

For CANopen and PROFIBUS-DP encoders



| Reference | Ø |
|---------------|--------|
| XCCR358RDL06 | 6 mm |
| XCCR358RDL08 | 8 mm |
| XCCR358RDL10 | 10 mm |
| XCCR358RDL12 | 12 mm |
| XCCR358RDL14 | 14 mm |
| XCCR358RDLU37 | 0.375" |
| XCCR358RDLU50 | 0.5" |

| | | | | | | | | | |
|---------------|----|---------------|----|-----------------|----|---------------|----|----------------|----|
| T | | XCC1510PSM03X | 15 | XCC1930TS11KN | 17 | XCCR158RDA08 | 14 | XCCRAR1214 | 36 |
| TCSCMCN1M1F1 | 44 | XCC1510PSM03Y | 15 | XCC1930TS11RN | 17 | | 15 | XCCRAR1216 | 36 |
| TCSCMCN1M1F2 | 44 | XCC1510PSM05X | 15 | XCC1930TS25KN | 17 | | 23 | XCCRAS06U25 | 36 |
| TCSCMCN1M1F5 | 44 | XCC1510PSM05Y | 15 | XCC1930TS25RN | 17 | | 29 | XCCRAS06U37 | 36 |
| TCSCMCN1M1F10 | 44 | XCC1510PSM11X | 15 | XCC1930TS36KN | 17 | XCCR158RDA10 | 14 | XCCRAS10U25 | 36 |
| TSXCANCA50 | 44 | XCC1510PSM11Y | 15 | XCC1930TS36RN | 17 | | 15 | XCCRAS10U37 | 36 |
| TSXCANCA100 | 44 | XCC1510PSM50X | 15 | XCC1930TS50KN | 17 | | 23 | XCCRAS10U37S | 36 |
| TSXCANCA300 | 44 | XCC1510PSM50Y | 15 | XCC1930TS50RN | 17 | | 29 | XCCRAS12U25 | 36 |
| TSXCANCD50 | 44 | XCC1510SPA03Y | 13 | XCC2506PS81KB | 23 | XCCR158RDA12 | 14 | XCCRAS12U37 | 36 |
| TSXCANCD100 | 44 | XCC1510SPA11Y | 13 | XCC2506PS81KGN | 23 | | 15 | XCCRAS12U50 | 36 |
| TSXCANCD300 | 44 | XCC1510SPA50Y | 13 | XCC2506PS81SBN | 23 | | 23 | XCCRAS0606 | 36 |
| | | XCC1514TS01X | 14 | XCC2506PS81SGN | 23 | | 29 | XCCRAS0608 | 36 |
| | | XCC1514TS01Y | 14 | XCC2510PS81KB | 23 | XCCR158RDAU37 | 29 | XCCRAS0610 | 36 |
| | | XCC1514TS03X | 14 | XCC2510PS81KGN | 23 | | 37 | XCCRAS0612 | 36 |
| | | XCC1514TS03Y | 14 | XCC2510PS81SBN | 23 | XCCR158RDAU50 | 29 | XCCRAS1008 | 36 |
| | | XCC1514TS05X | 14 | XCC2510SPA81SGN | 23 | | 37 | | 50 |
| | | XCC1514TS05Y | 14 | XCC2510SPA81KGN | 23 | XCCR290RDP12 | 17 | XCCRAS1010 | 36 |
| | | XCC1514TS10X | 14 | XCC2510SPA81SGN | 23 | | 25 | | 50 |
| | | XCC1514TS10Y | 14 | XCC2514TS81KB | 23 | | 31 | XCCRAS1010S | 36 |
| | | XCC1514TS11X | 14 | XCC2514TS81KG | 23 | XCCR290RDP16 | 17 | XCCRAS1012 | 36 |
| | | XCC1514TS11Y | 14 | XCC2514TS81SB | 23 | | 25 | | 50 |
| | | XCC1514TS25X | 14 | XCC2514TS81SG | 23 | | 31 | XCCRAS1012S | 36 |
| | | XCC1514TS25Y | 14 | XCC2912PS81KBN | 25 | XCCR290RDP20 | 17 | XCCRAS1208 | 36 |
| | | XCC1514TS50X | 14 | XCC2912PS81KGN | 25 | | 25 | XCCRAS1212 | 36 |
| | | XCC1514TS50Y | 14 | XCC2912PS81SBN | 25 | | 31 | XCCRB1 | 37 |
| | | XCC1514TSM02X | 15 | XCC2912PS81SGN | 25 | | 37 | XCCRB2 | 37 |
| | | XCC1514TSM02Y | 15 | XCC2930TS81KBN | 25 | XCCR290RDP25 | 17 | XCCRB3 | 37 |
| | | XCC1514TSM03X | 15 | XCC2930TS81KGN | 25 | | 25 | XCCRB6 | 37 |
| | | XCC1514TSM03Y | 15 | XCC2930TS81SBN | 25 | | 31 | XCCRE5RN | 37 |
| | | XCC1514TSM05X | 15 | XCC2930TS81SGN | 25 | XCCR290RDPU1 | 37 | XCCRE5S | 37 |
| | | XCC1514TSM05Y | 15 | XCC3506PS48SBN | 29 | XCCR290RDPU37 | 37 | XCCRE5SN | 37 |
| | | XCC1514TSM11X | 15 | XCC3506PS48SGN | 29 | XCCR290RDPU50 | 37 | XCCRE9RN | 37 |
| | | XCC1514TSM11Y | 15 | XCC3506PS84SBN | 29 | XCCR290RDPU75 | 37 | XCCRE9SN | 37 |
| | | XCC1514TSM50X | 15 | XCC3506PS84SGN | 29 | XCCR358RDL06 | 44 | XCCRF4 | 37 |
| | | XCC1514TSM50Y | 15 | XCC3510PS48SBN | 29 | | 48 | XCCRF5B | 50 |
| | | XCC1912PS00KN | 17 | XCC3510PS48SGN | 29 | | 50 | XCCRF5N | 37 |
| | | XCC1912PS00RN | 17 | XCC3514TS84SB | 29 | XCCR358RDL08 | 44 | XCCRF9 | 37 |
| | | XCC1912PS01KN | 17 | XCC3514TS84SG | 29 | | 48 | XCCRG5 | 37 |
| | | XCC1912PS01RN | 17 | XCC3515CS84CBN | 44 | | 50 | XCCRG9 | 37 |
| | | XCC1912PS03KN | 17 | XCC3515CV84FBN | 48 | XCCR358RDL10 | 44 | XCCRM23SUB37NB | 35 |
| | | XCC1912PS03RN | 17 | XCC3912PS84SBN | 31 | | 48 | XCCRM23SUB37NG | 35 |
| | | XCC1912PS05KN | 17 | XCC3912PS84SGN | 31 | XCCR358RDL12 | 44 | XCCRM23SUB37PB | 35 |
| | | XCC1912PS05RN | 17 | XCC3930TS84SBN | 31 | | 48 | XCCRM23SUB37PG | 35 |
| | | XCC1912PS10KN | 17 | XCC3930TS84SGN | 31 | XCCR358RDL14 | 44 | XCCRX10 | 35 |
| | | XCC1912PS10RN | 17 | XCCCPM23121L2 | 35 | | 48 | XCCRX16 | 35 |
| | | XCC1912PS11KN | 17 | XCCCPM23121L5 | 35 | XCCR358RDLU37 | 44 | XCCRXS8 | 35 |
| | | XCC1912PS11RN | 17 | XCCCPM23121L10 | 35 | | 48 | XZCC12FDB50R | 44 |
| | | XCC1912PS25KN | 17 | XCCCPM23122L2 | 35 | | 50 | XZCC12MDB50R | 44 |
| | | XCC1912PS25RN | 17 | XCCCPM23122L5 | 35 | XCCR358RDLU50 | 44 | XZCC23FDP120S | 35 |
| | | XCC1912PS36KN | 17 | XCCCPM23122L10 | 35 | | 48 | XZCC23FDP160S | 35 |
| | | XCC1912PS36RN | 17 | XCCCPM23161L2 | 35 | | 50 | XZCC23FMDP120S | 35 |
| | | XCC1912PS50KN | 17 | XCCCPM23161L5 | 35 | XCCRAE0606 | 36 | XZCC23FMDP370S | 35 |
| | | XCC1912PS50RN | 17 | XCCCPM23161L10 | 35 | XCCRAR0606 | 36 | | |
| | | XCC1930TS00KN | 17 | XCCCPM23161L10 | 35 | XCCRAR0608 | 36 | | |
| | | XCC1930TS00RN | 17 | XCCR158RDA06 | 14 | XCCRAR0610 | 36 | | |
| | | XCC1930TS01KN | 17 | | 15 | XCCRAR0612 | 36 | | |
| | | XCC1930TS01RN | 17 | | 23 | XCCRAR0614 | 36 | | |
| | | XCC1930TS03KN | 17 | | 29 | XCCRAR0616 | 36 | | |
| | | XCC1930TS03RN | 17 | | 37 | XCCRAR1008 | 36 | | |
| | | XCC1930TS05KN | 17 | | | XCCRAR1010 | 36 | | |
| | | XCC1930TS05RN | 17 | | | XCCRAR1012 | 36 | | |
| | | XCC1930TS10KN | 17 | | | XCCRAR1014 | 36 | | |
| | | XCC1930TS10RN | 17 | | | XCCRAR1016 | 36 | | |
| | | | | | | XCCRAR1208 | 36 | | |
| | | | | | | XCCRAR1212 | 36 | | |

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

www.tesensors.com

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric